Wiring diagram for CAB100A PDT101 voltage model with serial port server and 24 V DC power supply

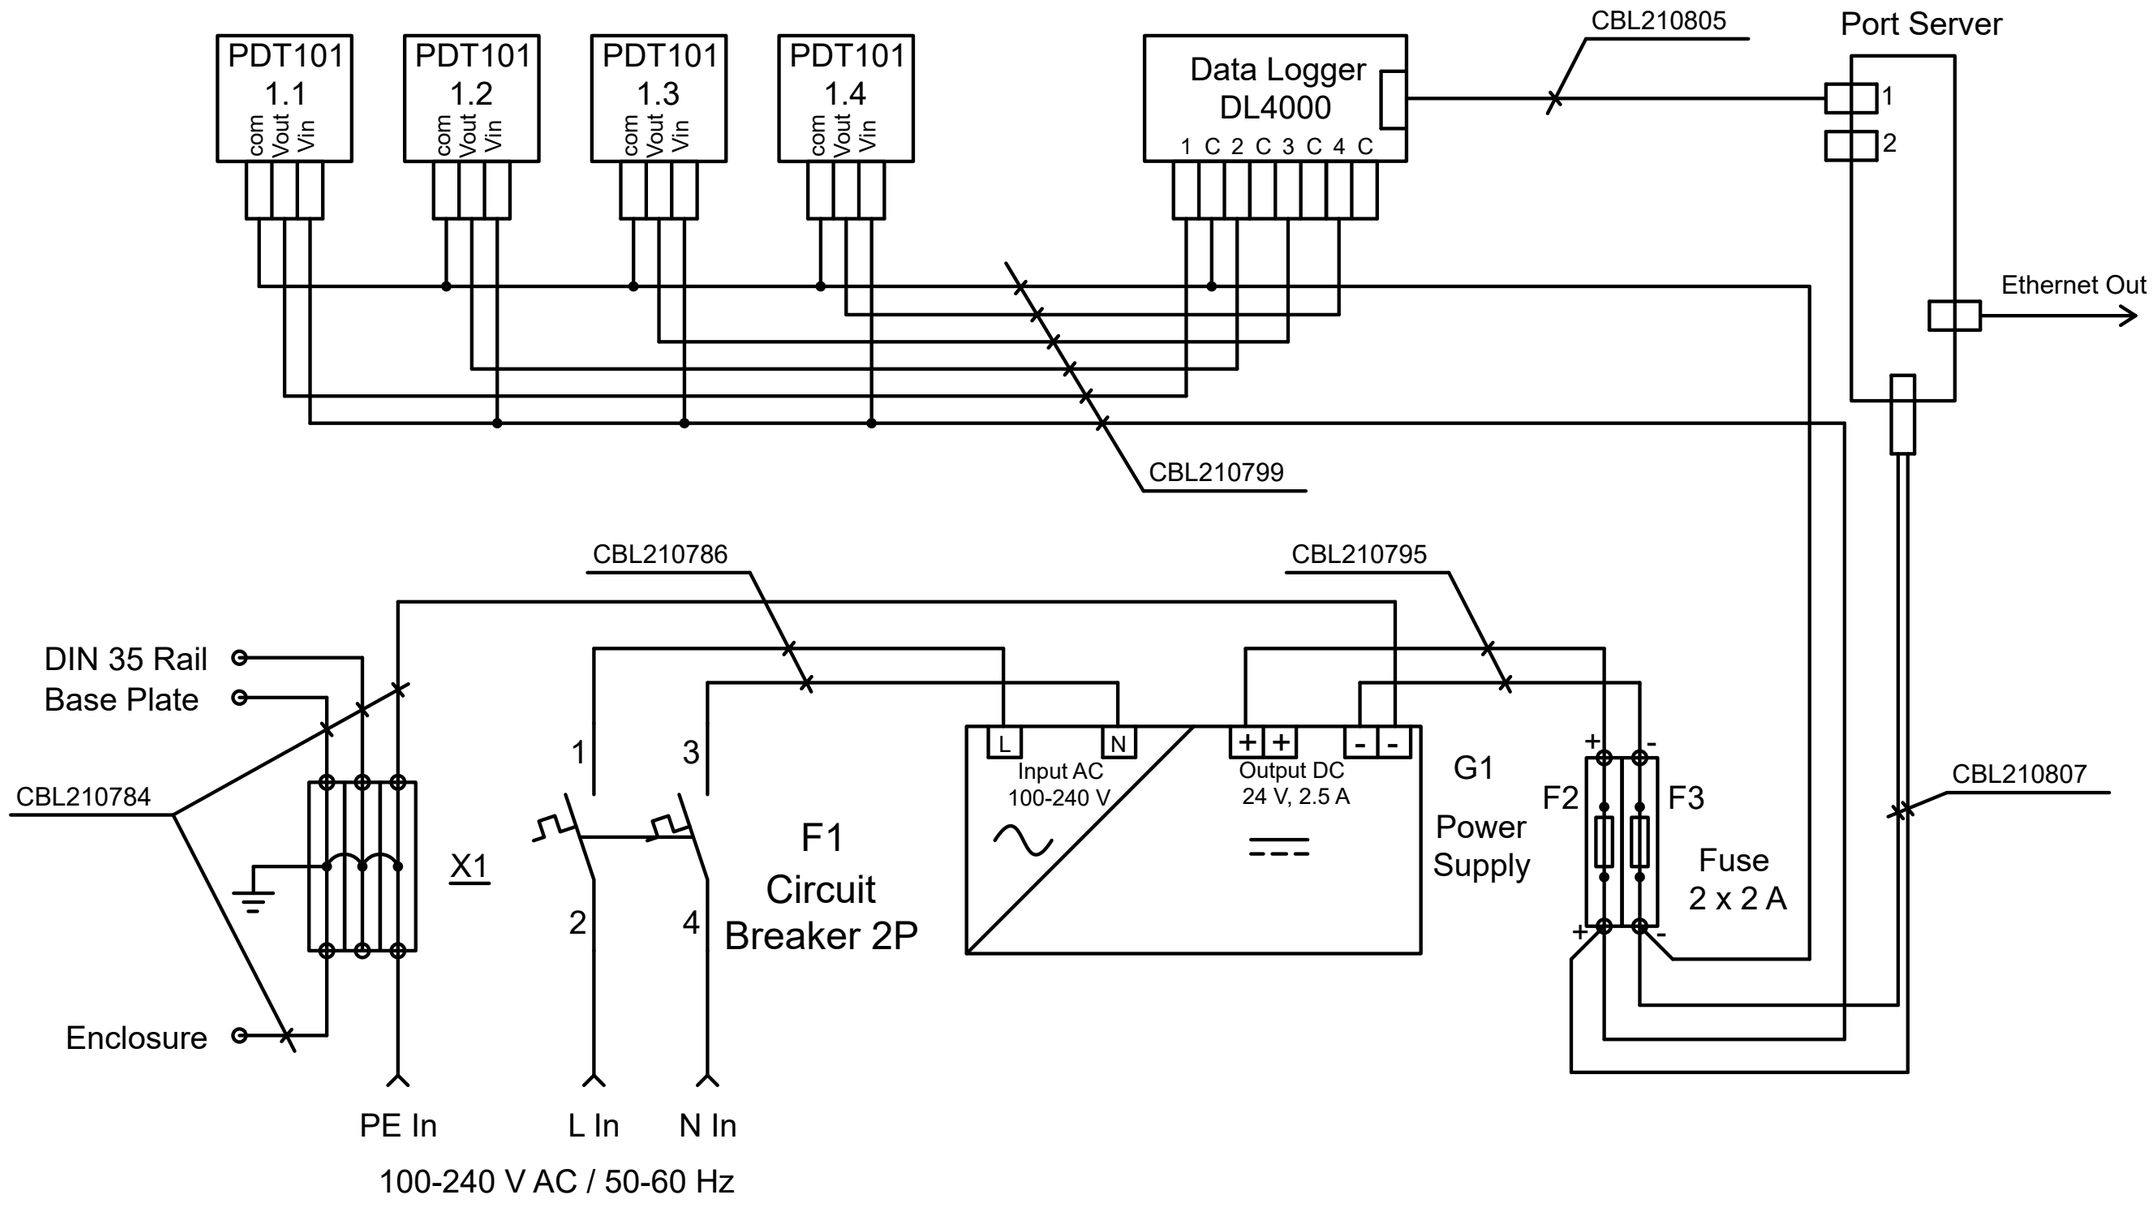

PUBLISHED BY
Vaisala Oyj
Vanha Nurmijärventie 21
FI-01670 Vantaa, Finland
+358 9 8949 1

M212294EN-D © Vaisala 2026
All rights reserved. Any logos and/or product names are trademarks of Vaisala or its individual partners. Any reproduction, transfer, distribution or storage of information contained in this document is strictly prohibited. All specifications — technical included — are subject to change without notice.

Wiring diagram for CAB100A PDT101 voltage model with vNet PoE

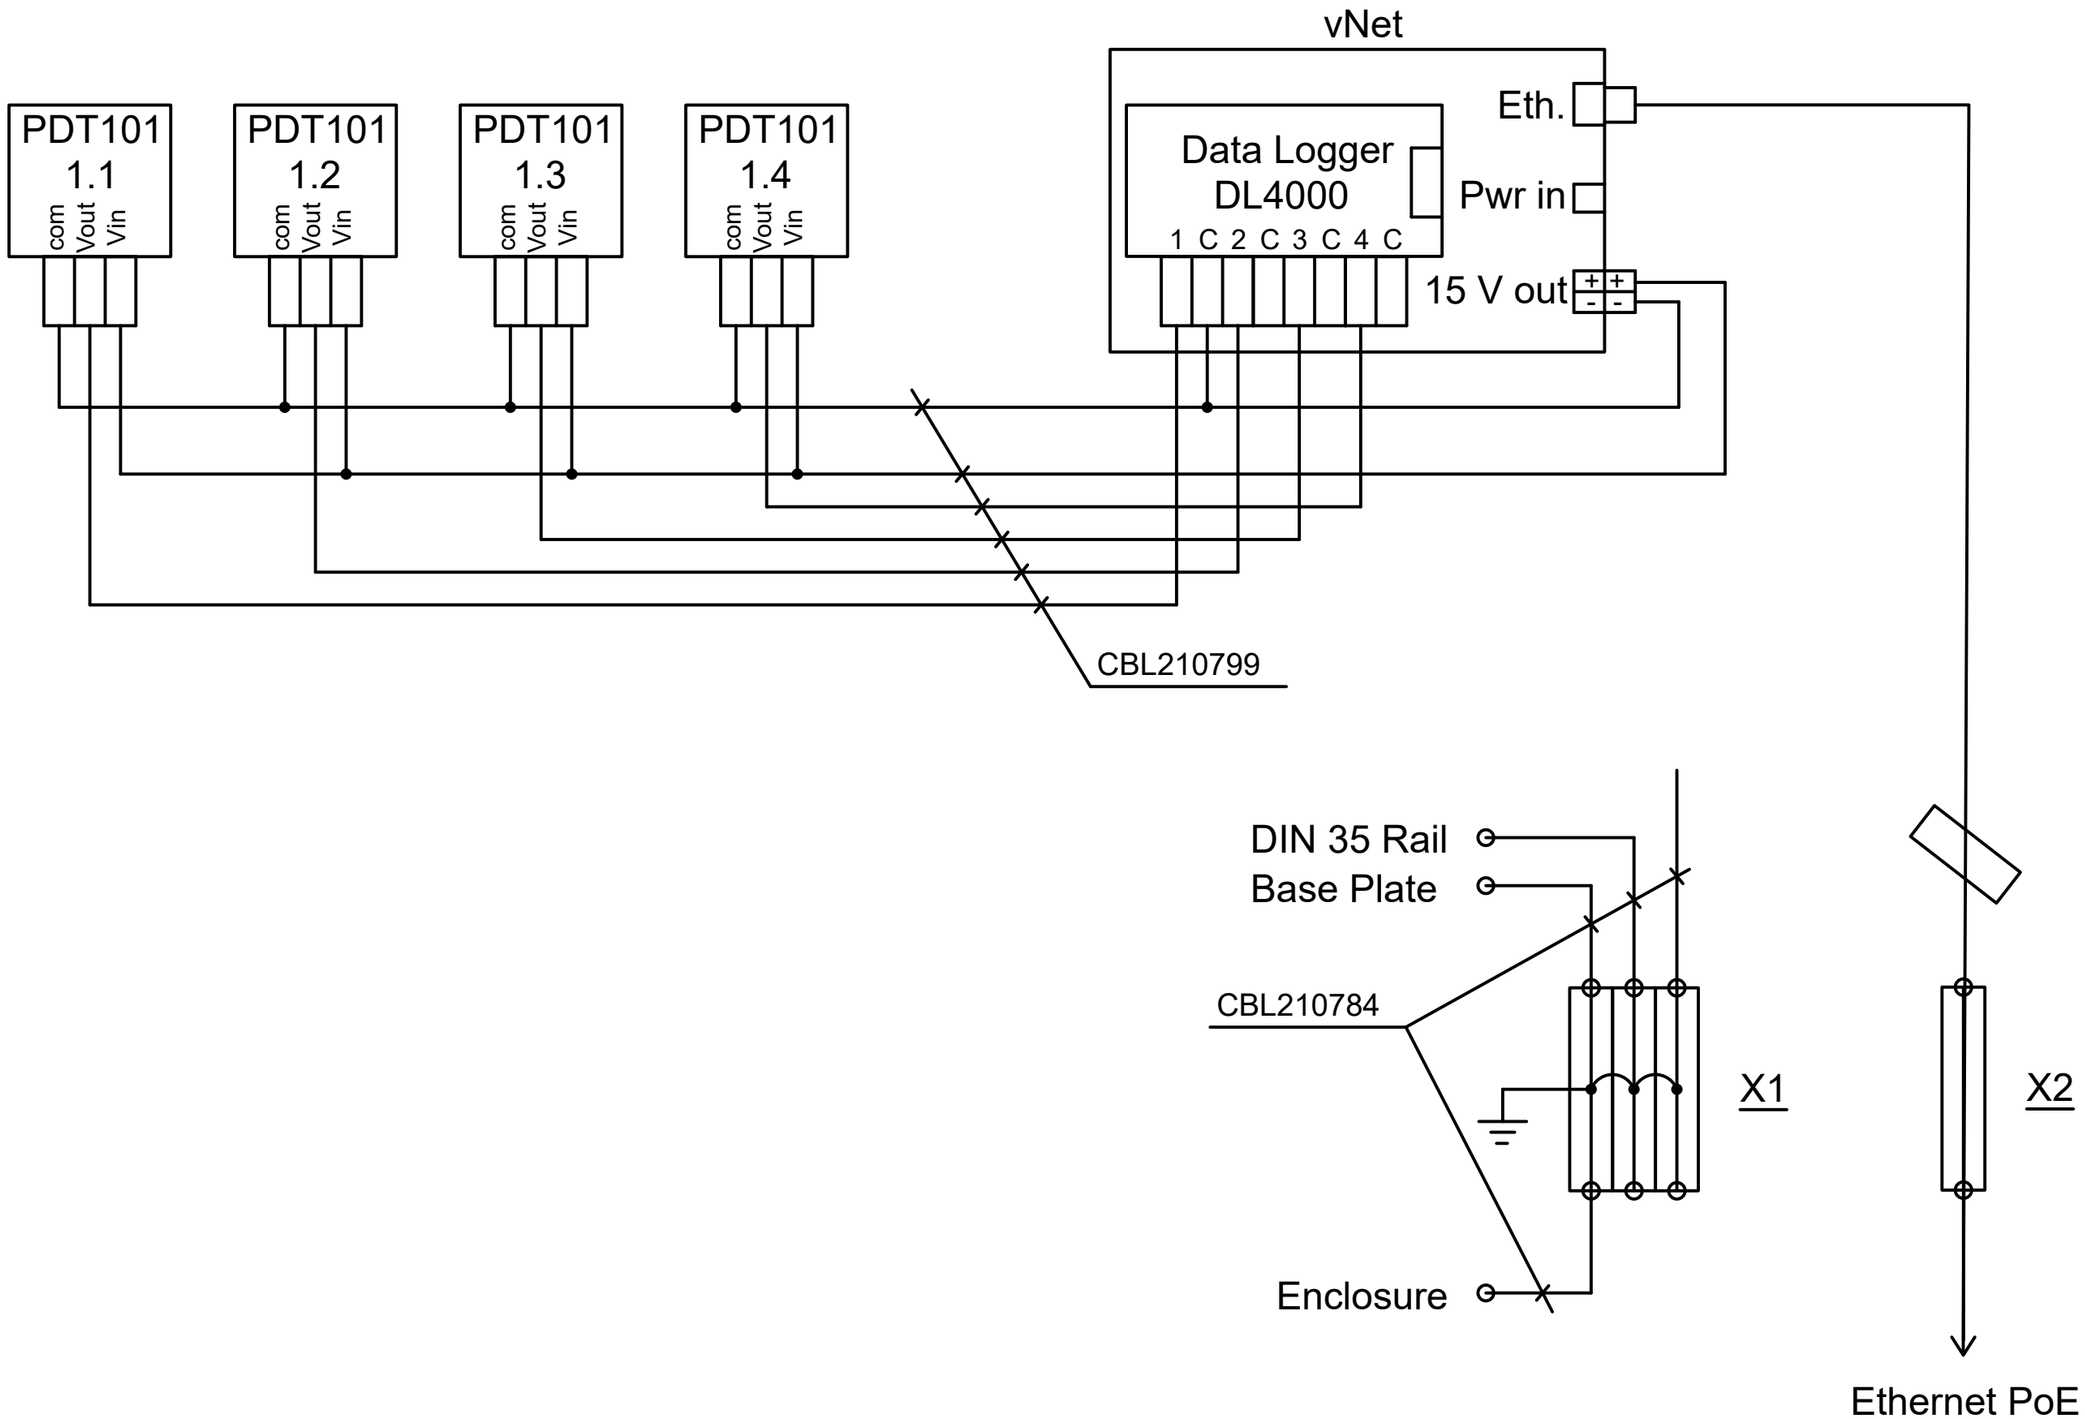

Wiring diagram for CAB100A analog channel model with serial port server and 24 V DC power supply

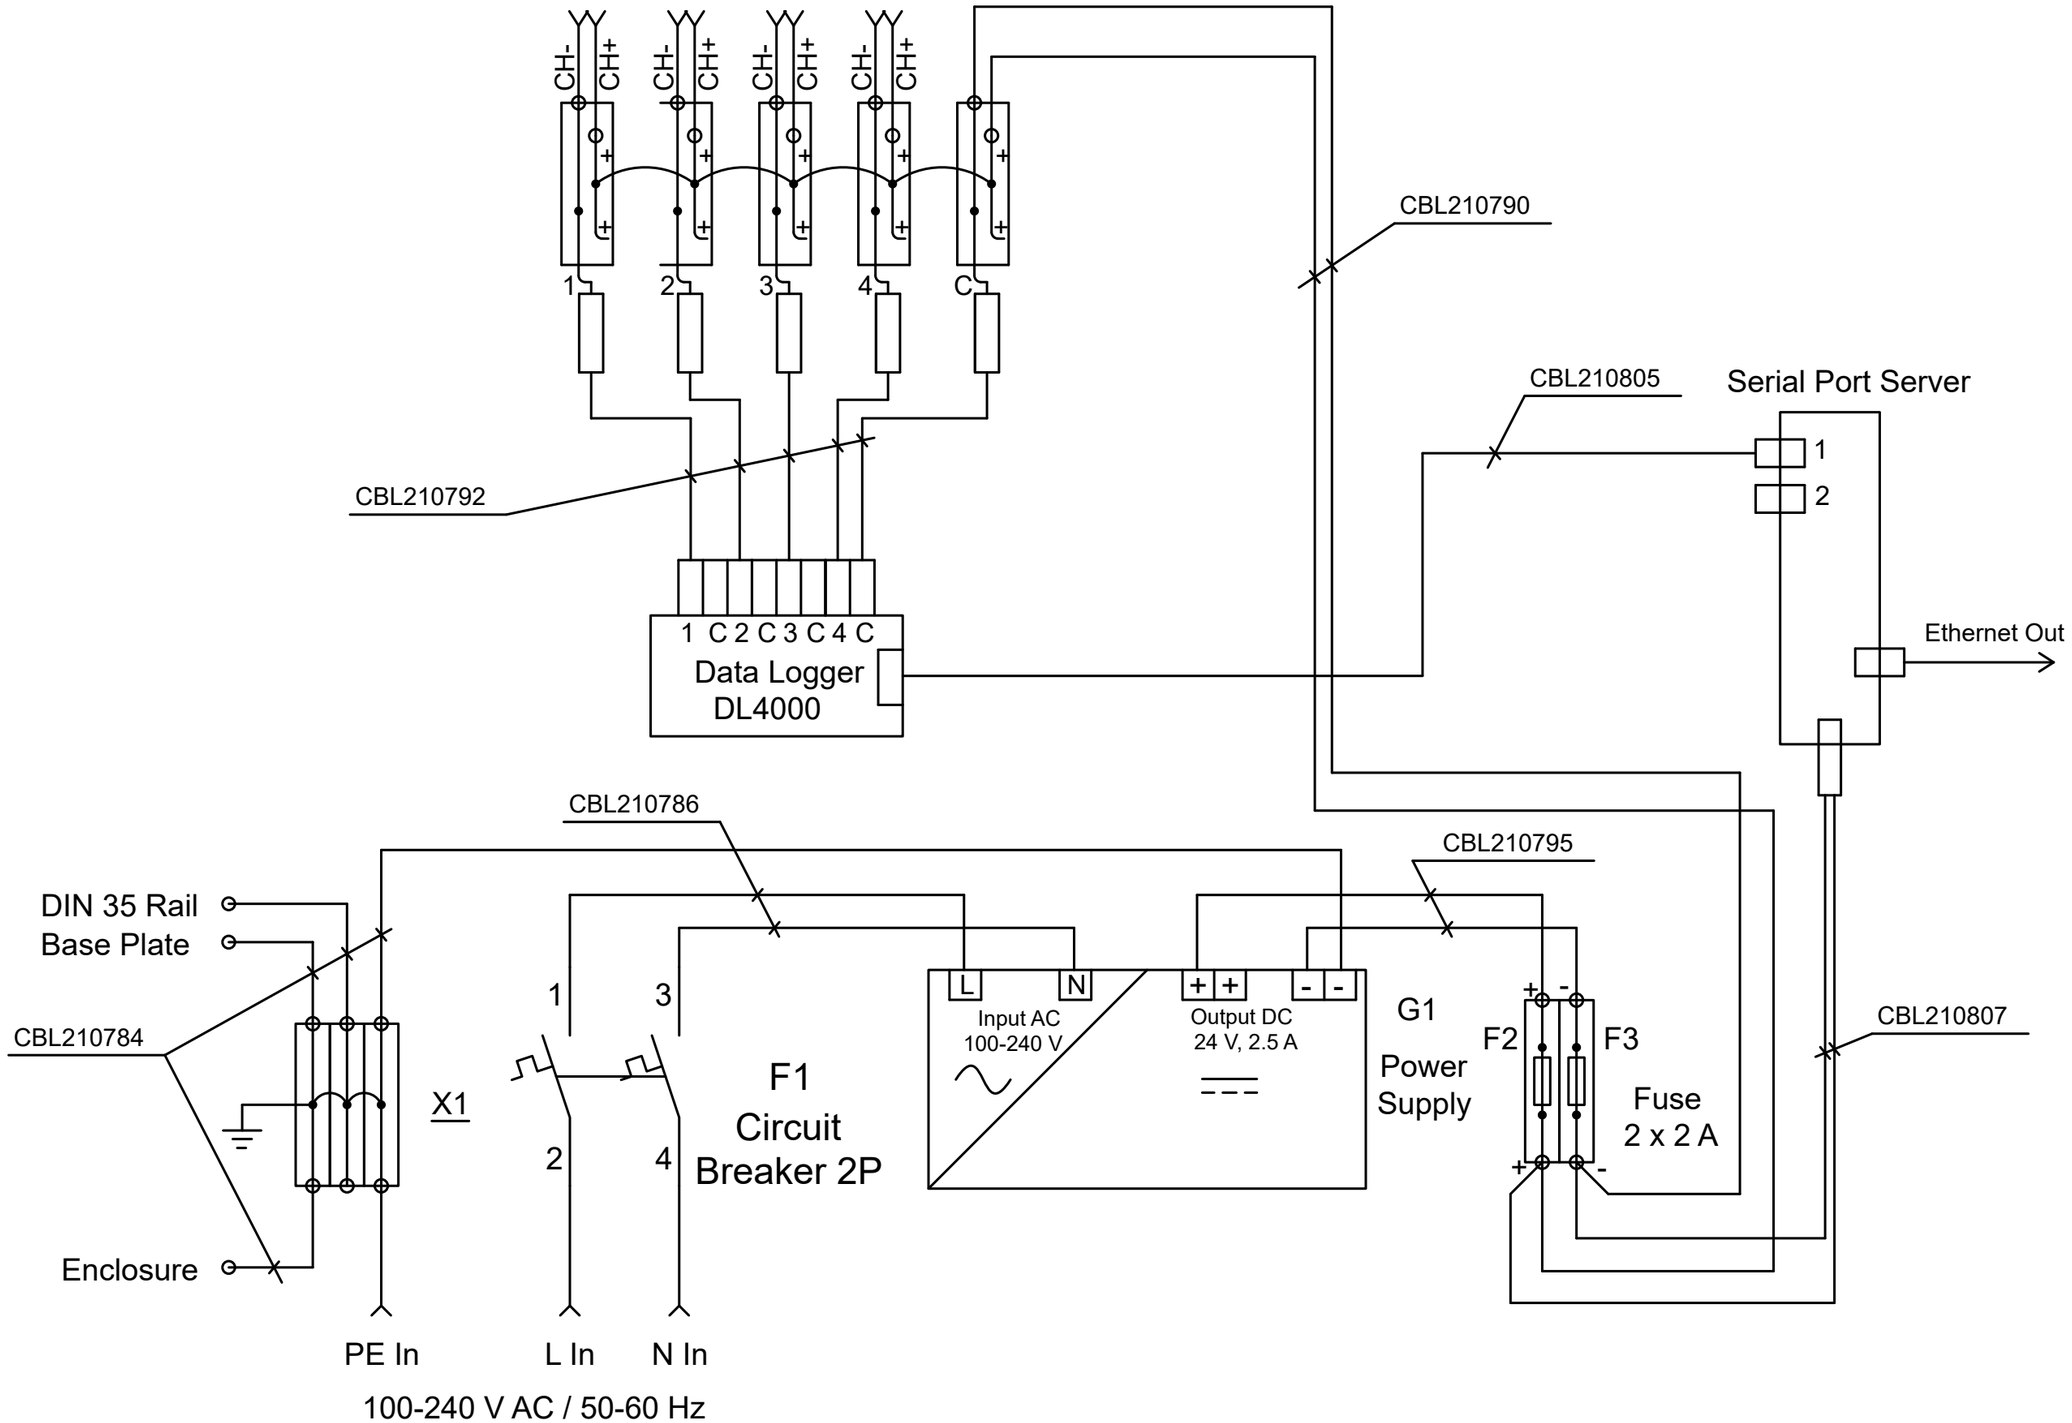

Wiring diagram for CAB100A safety barrier model with serial port server and 24 V DC power supply

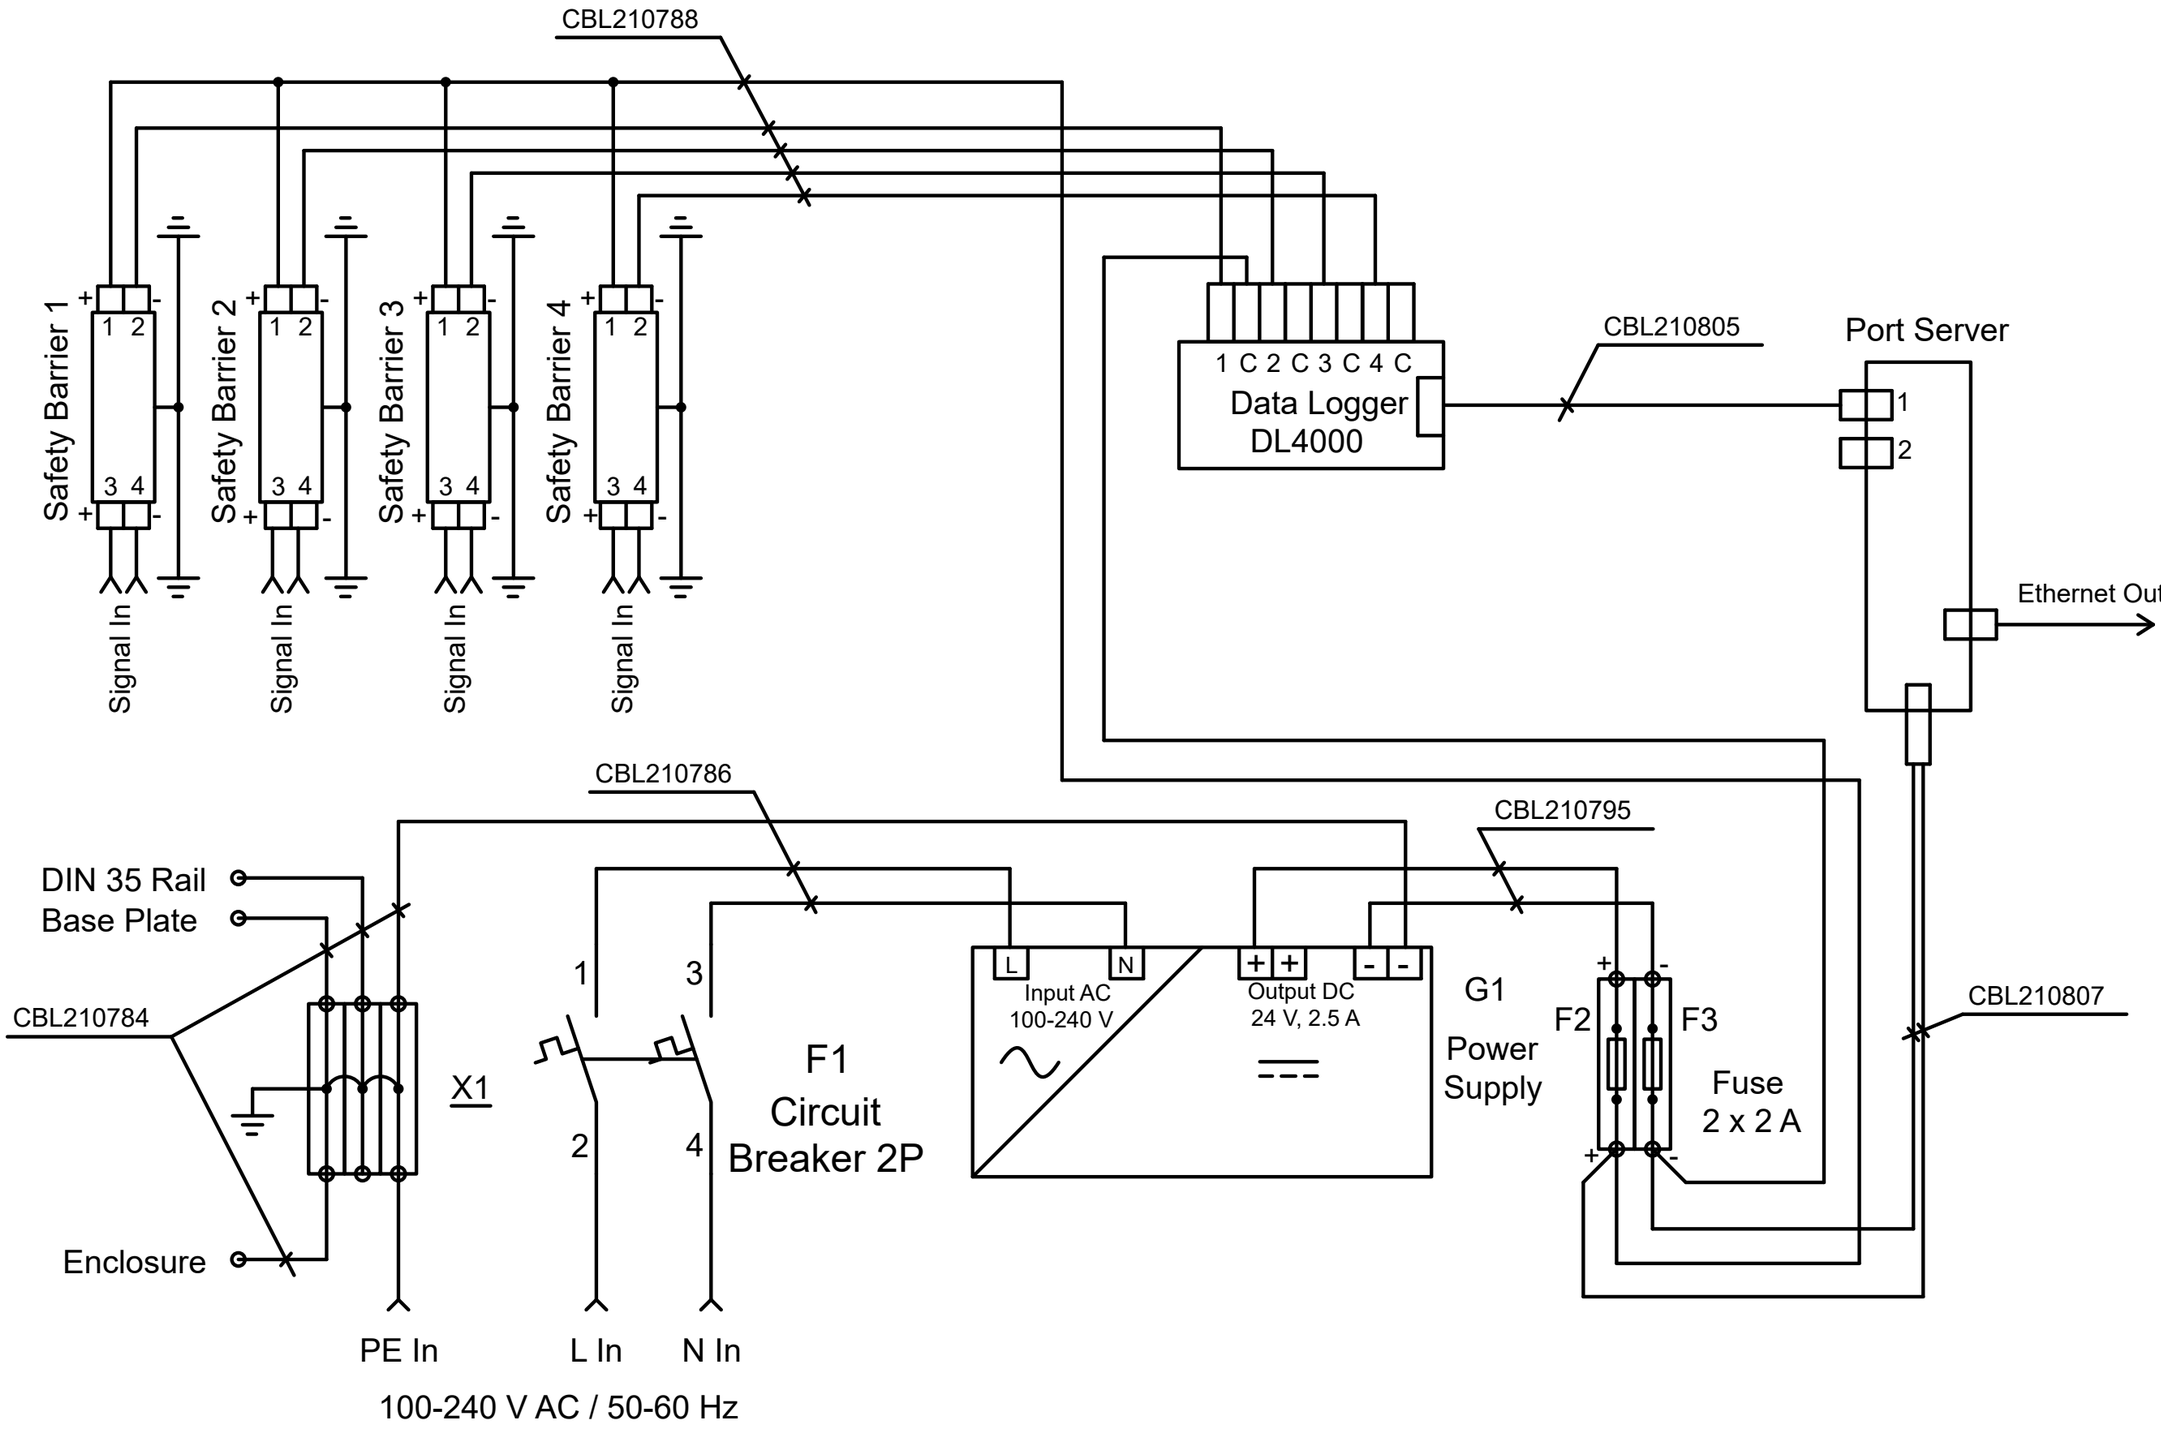

Wiring diagram for CAB100A galvanic isolator model with serial port server and 24 V DC power supply

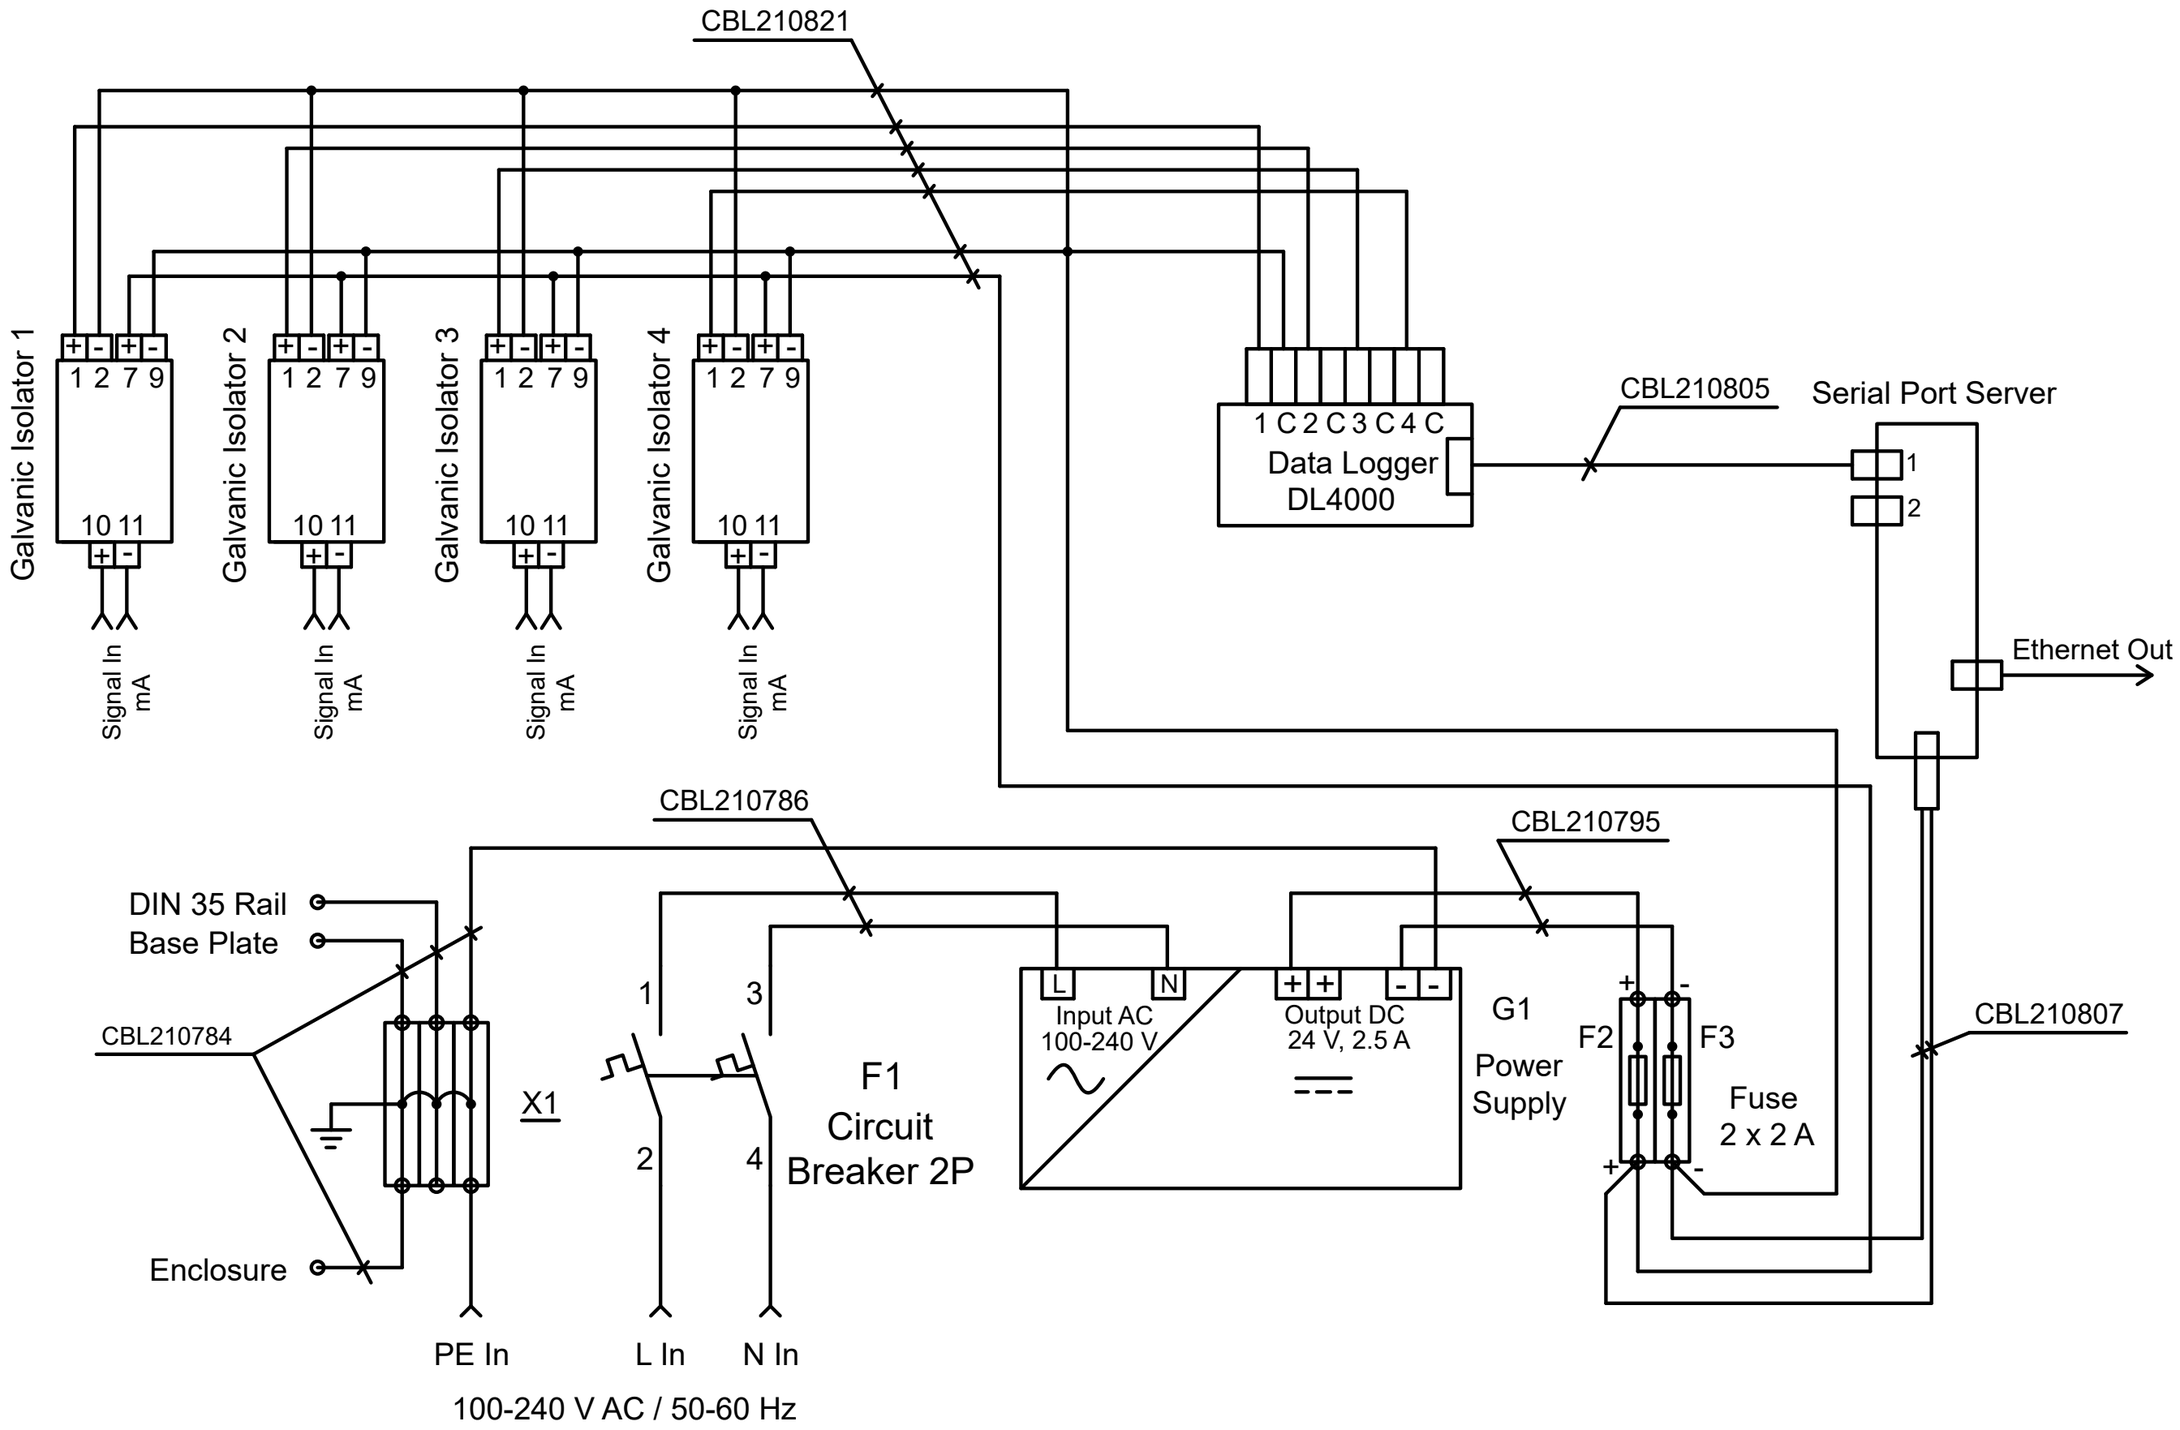

Wiring diagram for CAB100D PDT101 model with serial port server

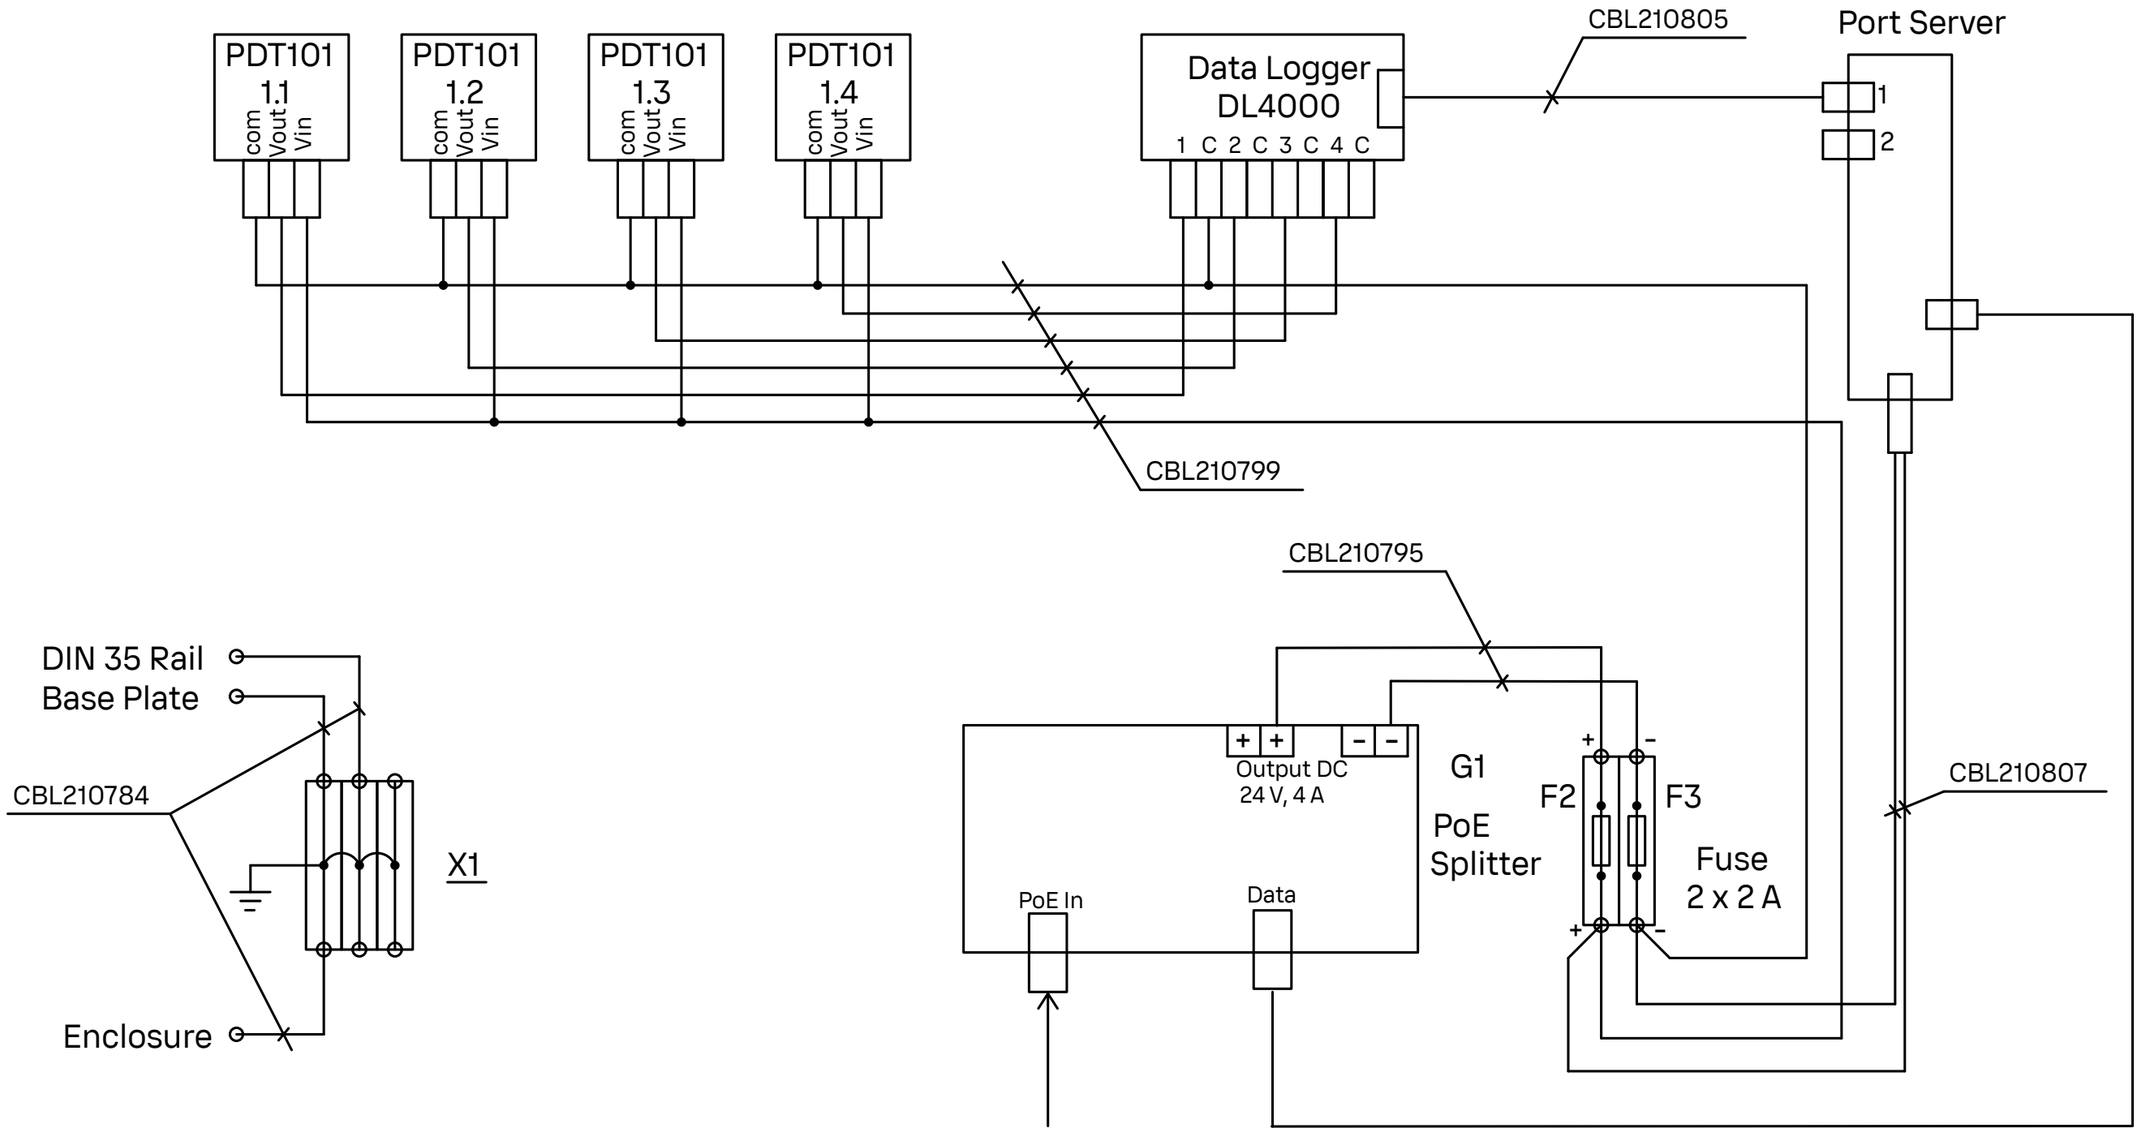

Wiring diagram for CAB100D analog channel model with serial port server

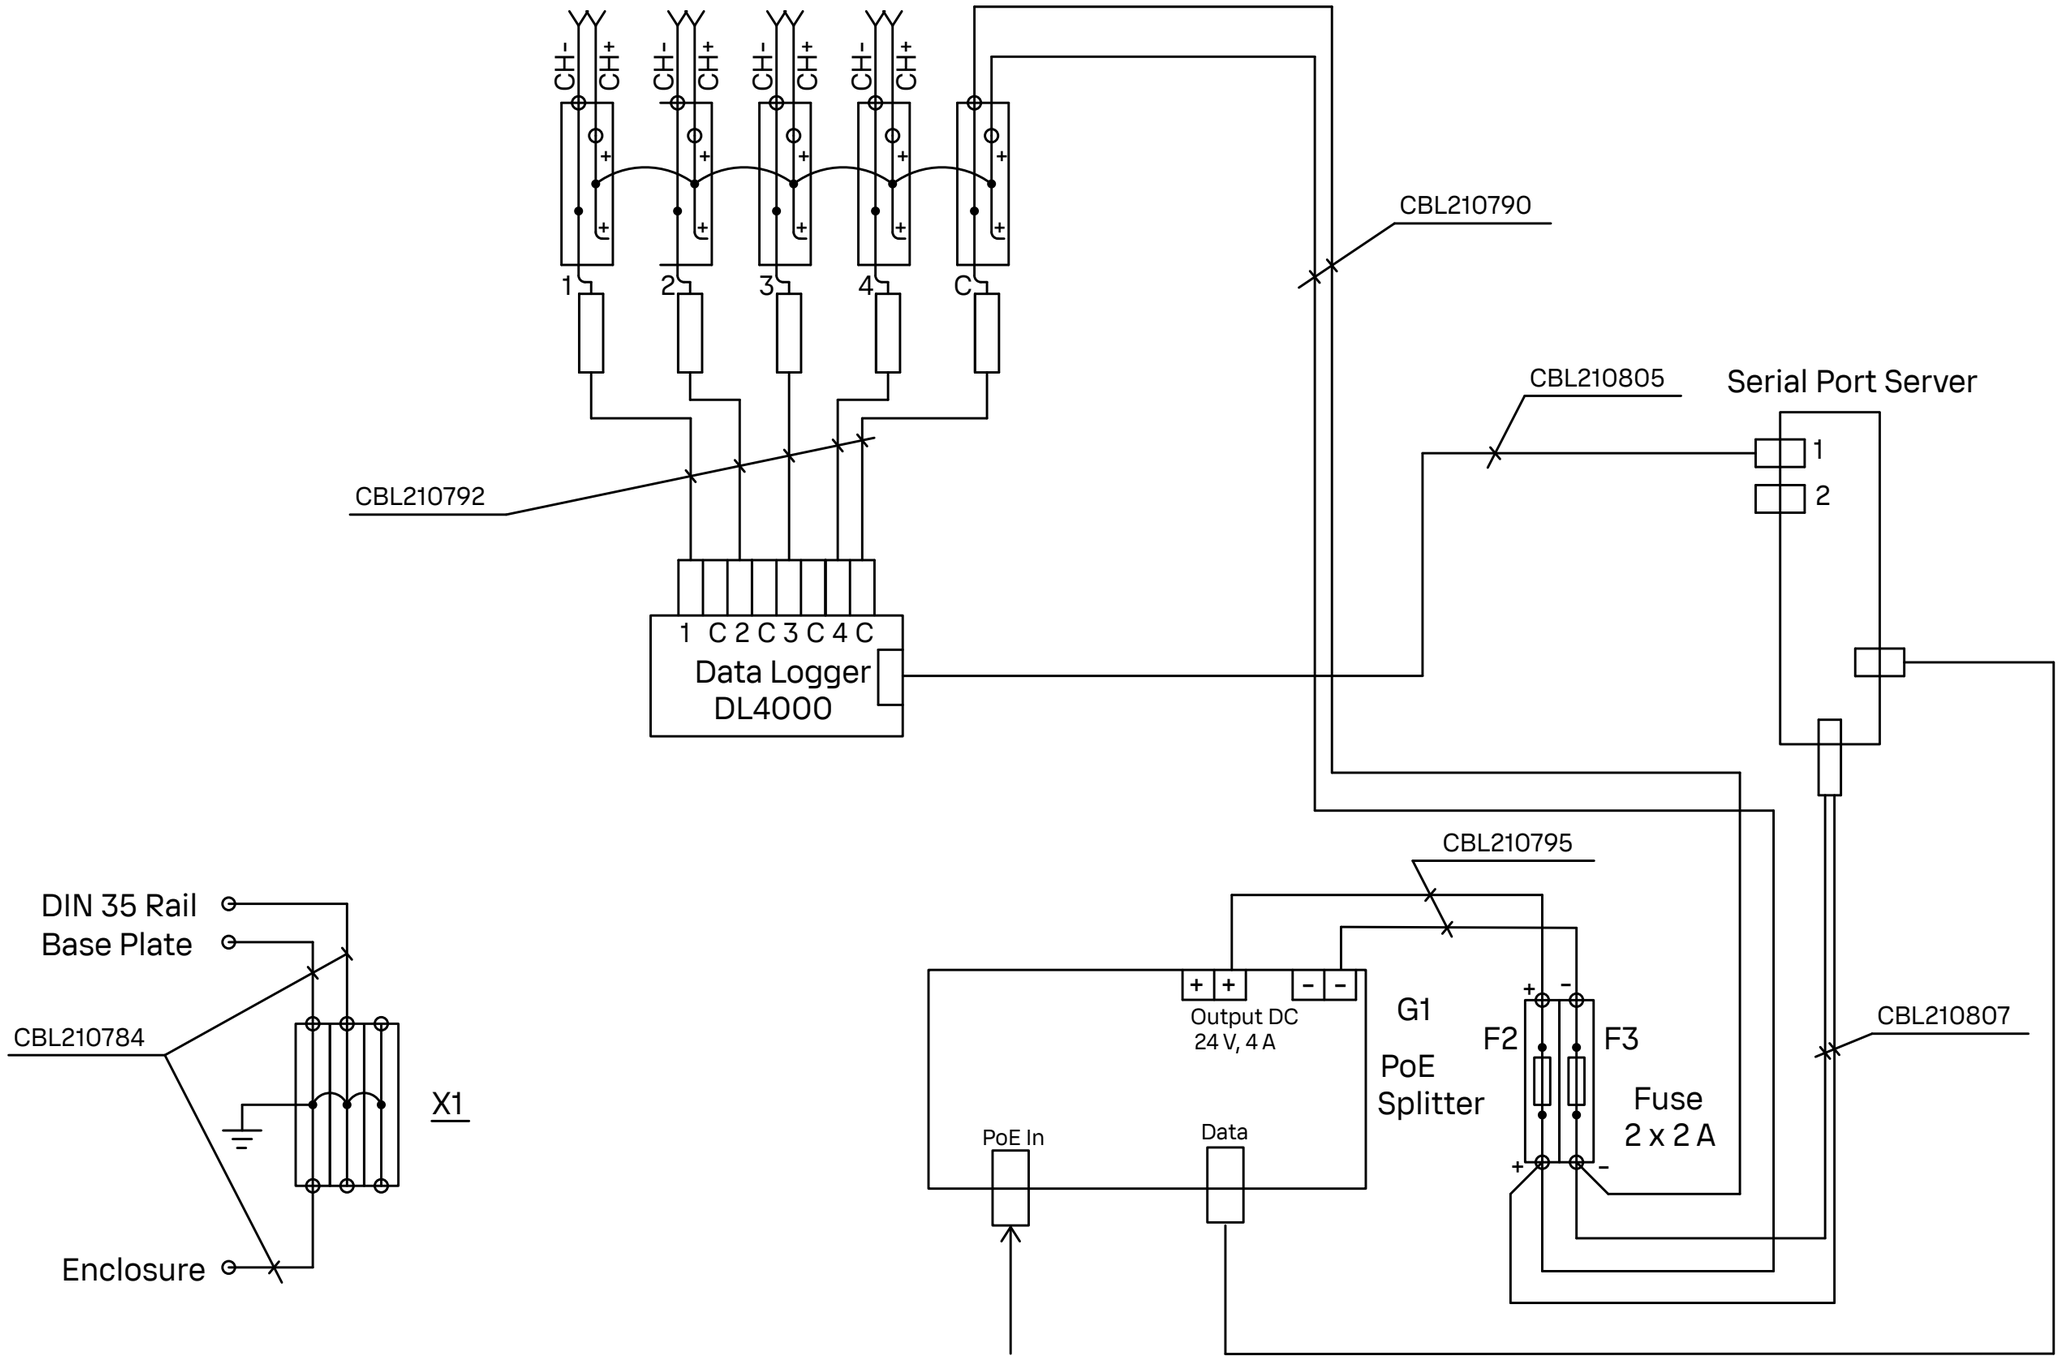

Wiring diagram for CAB100D safety barrier model with serial port server

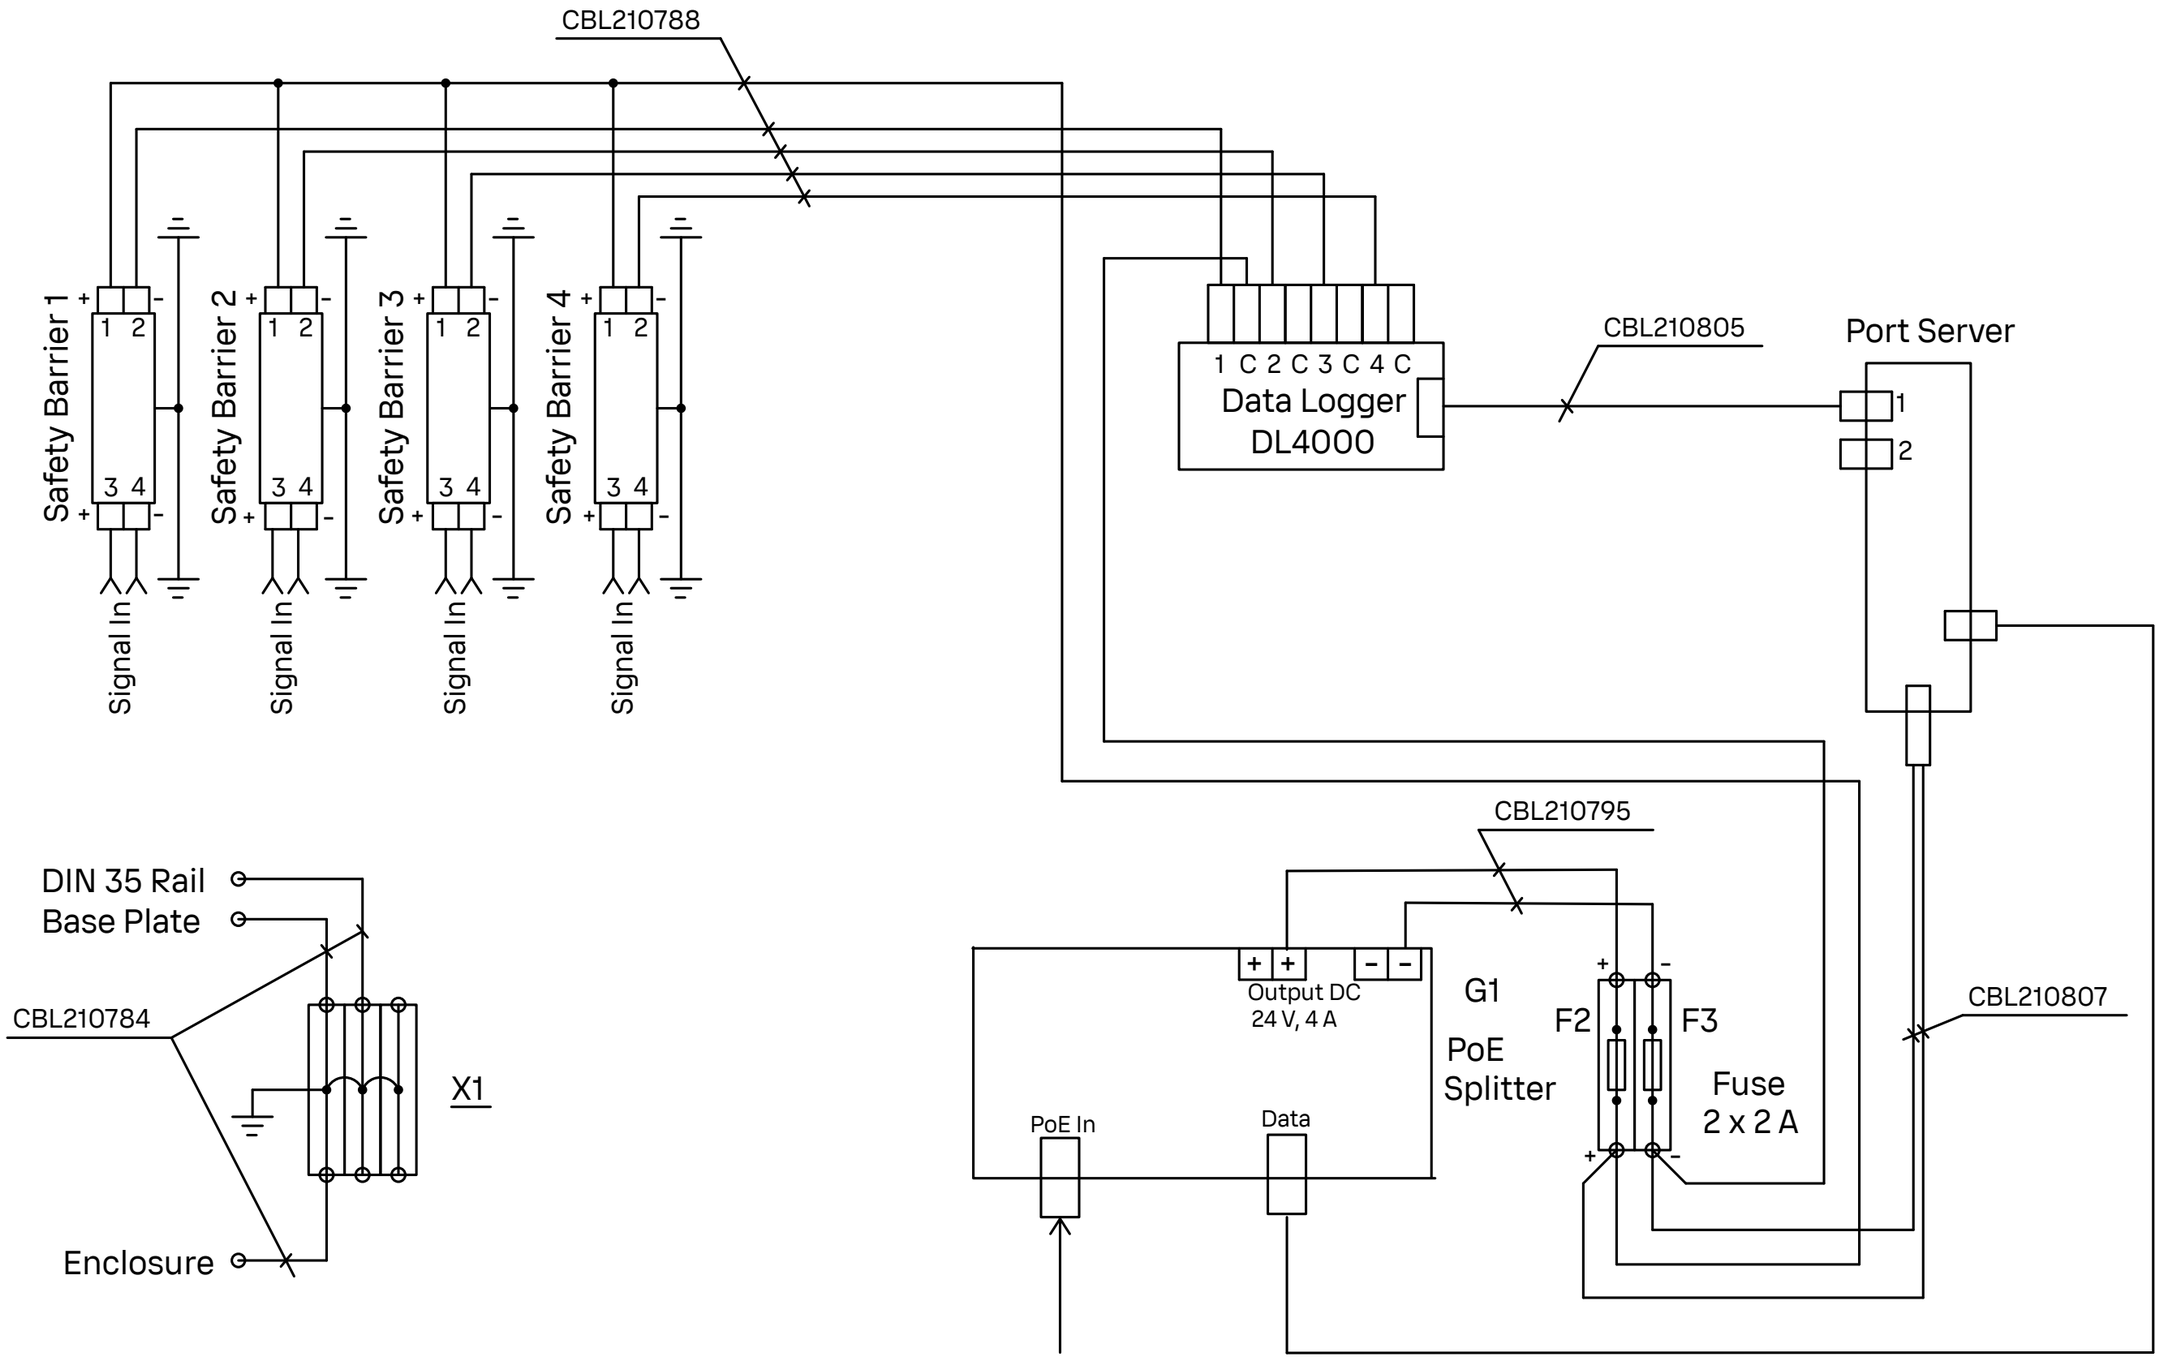

Wiring diagram for CAB100D galvanic isolator model with serial port server

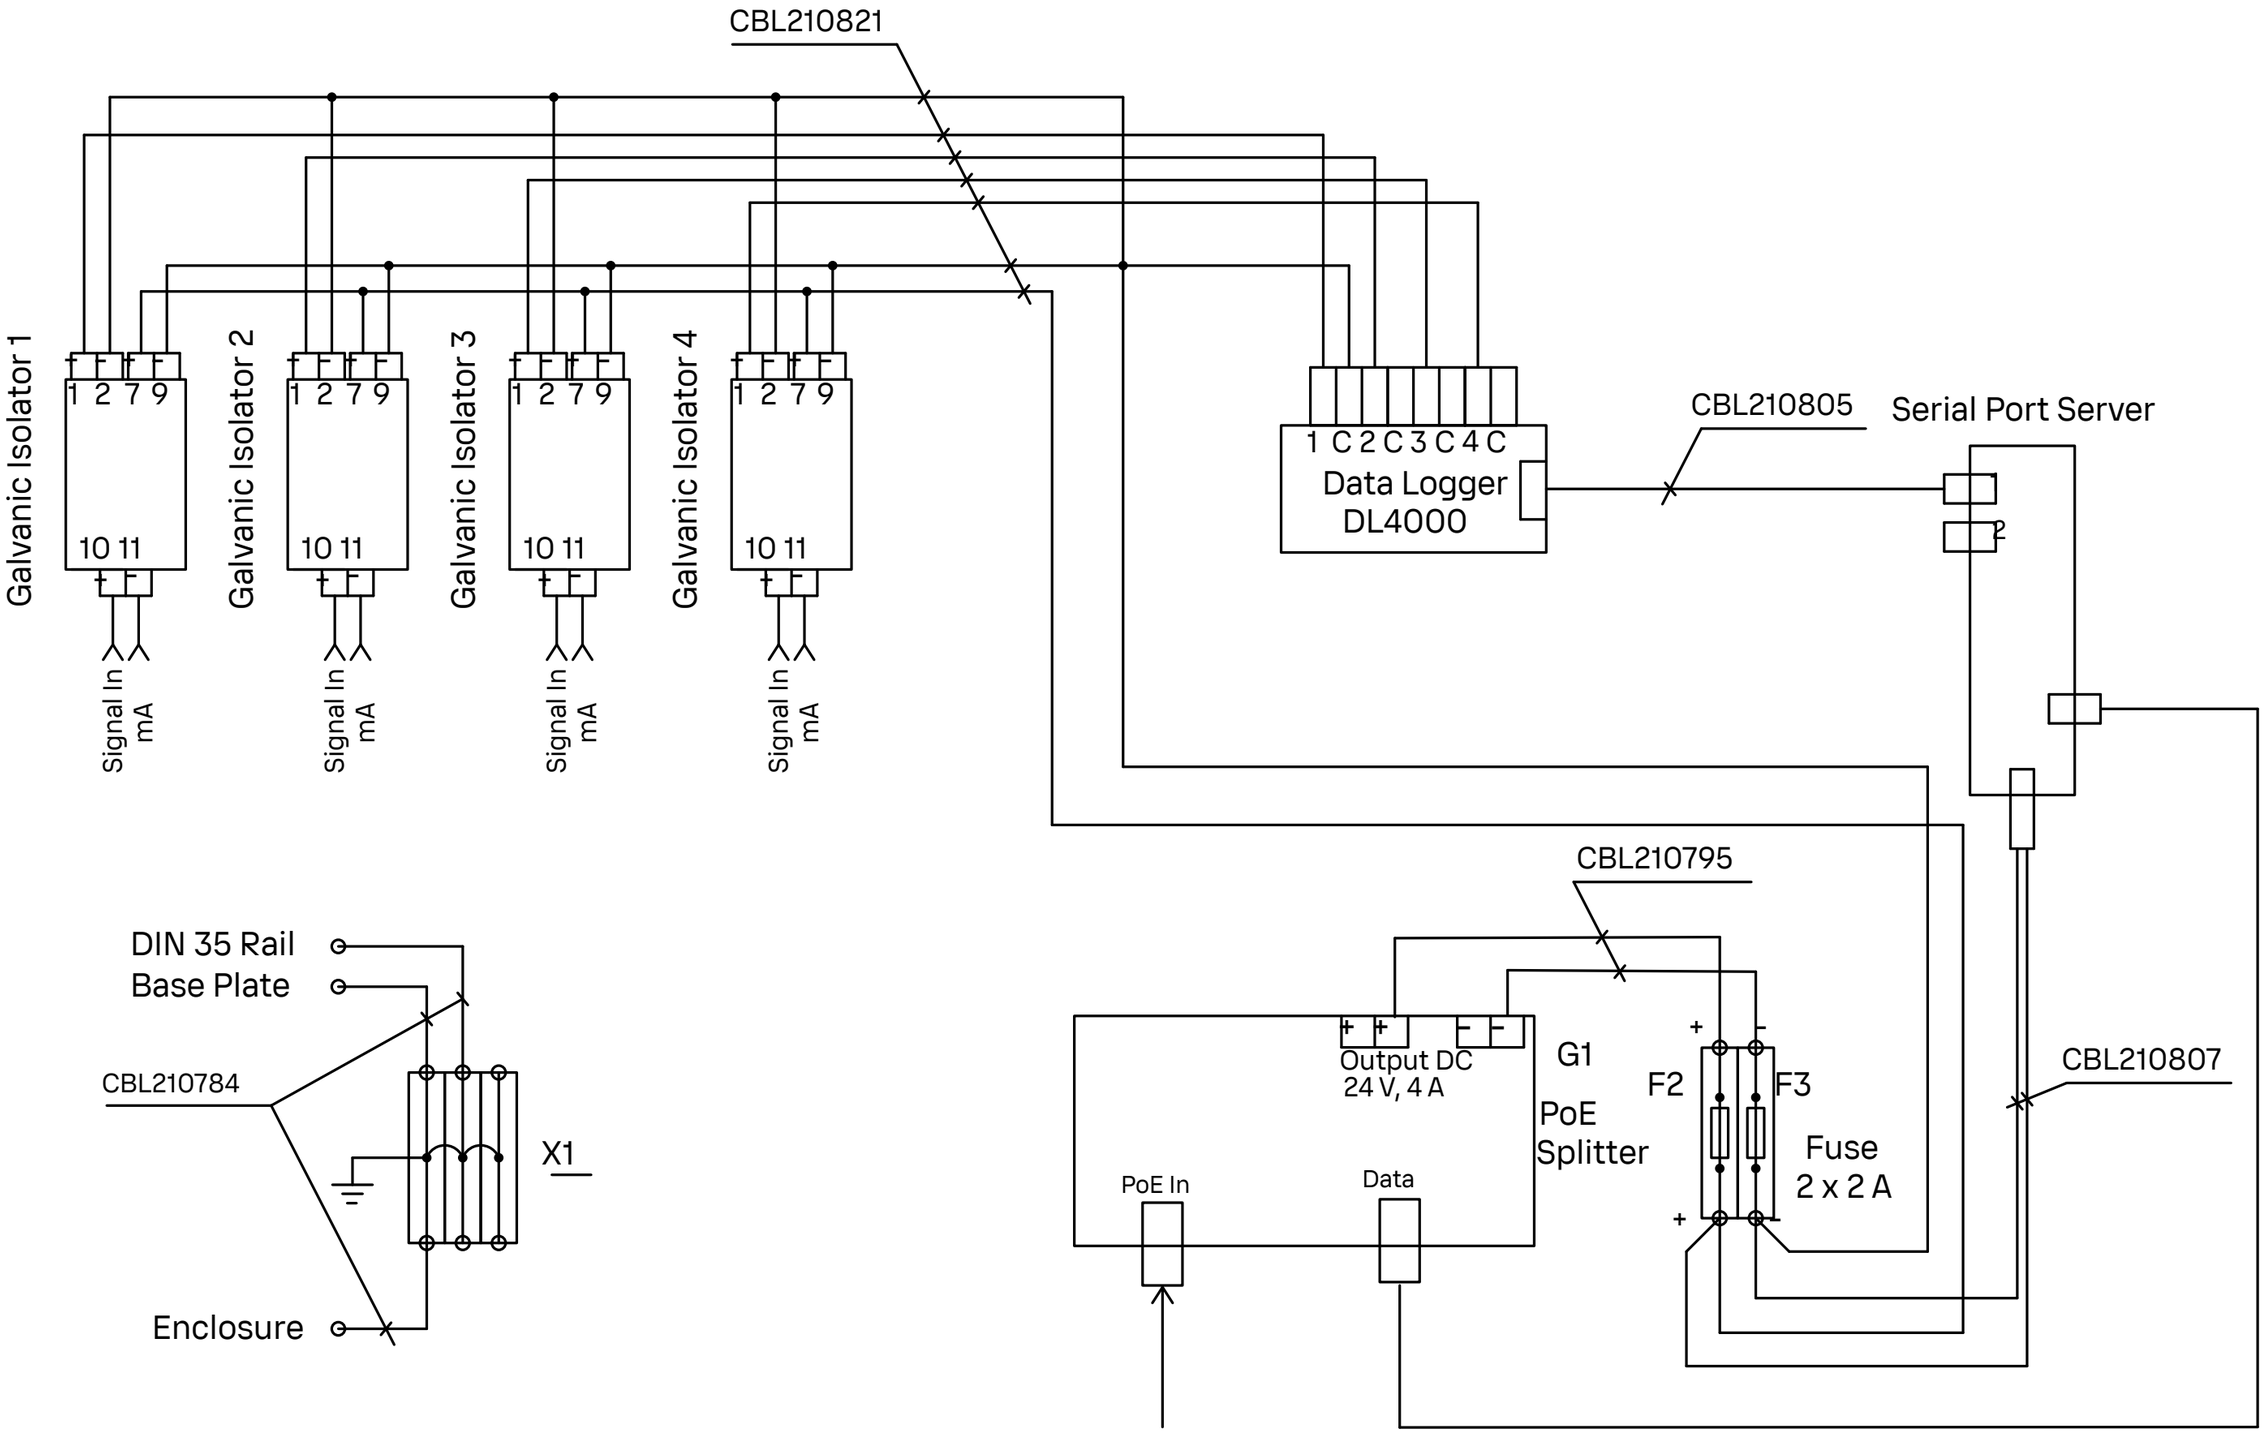

Wiring diagram for CAB100B PDT101 model

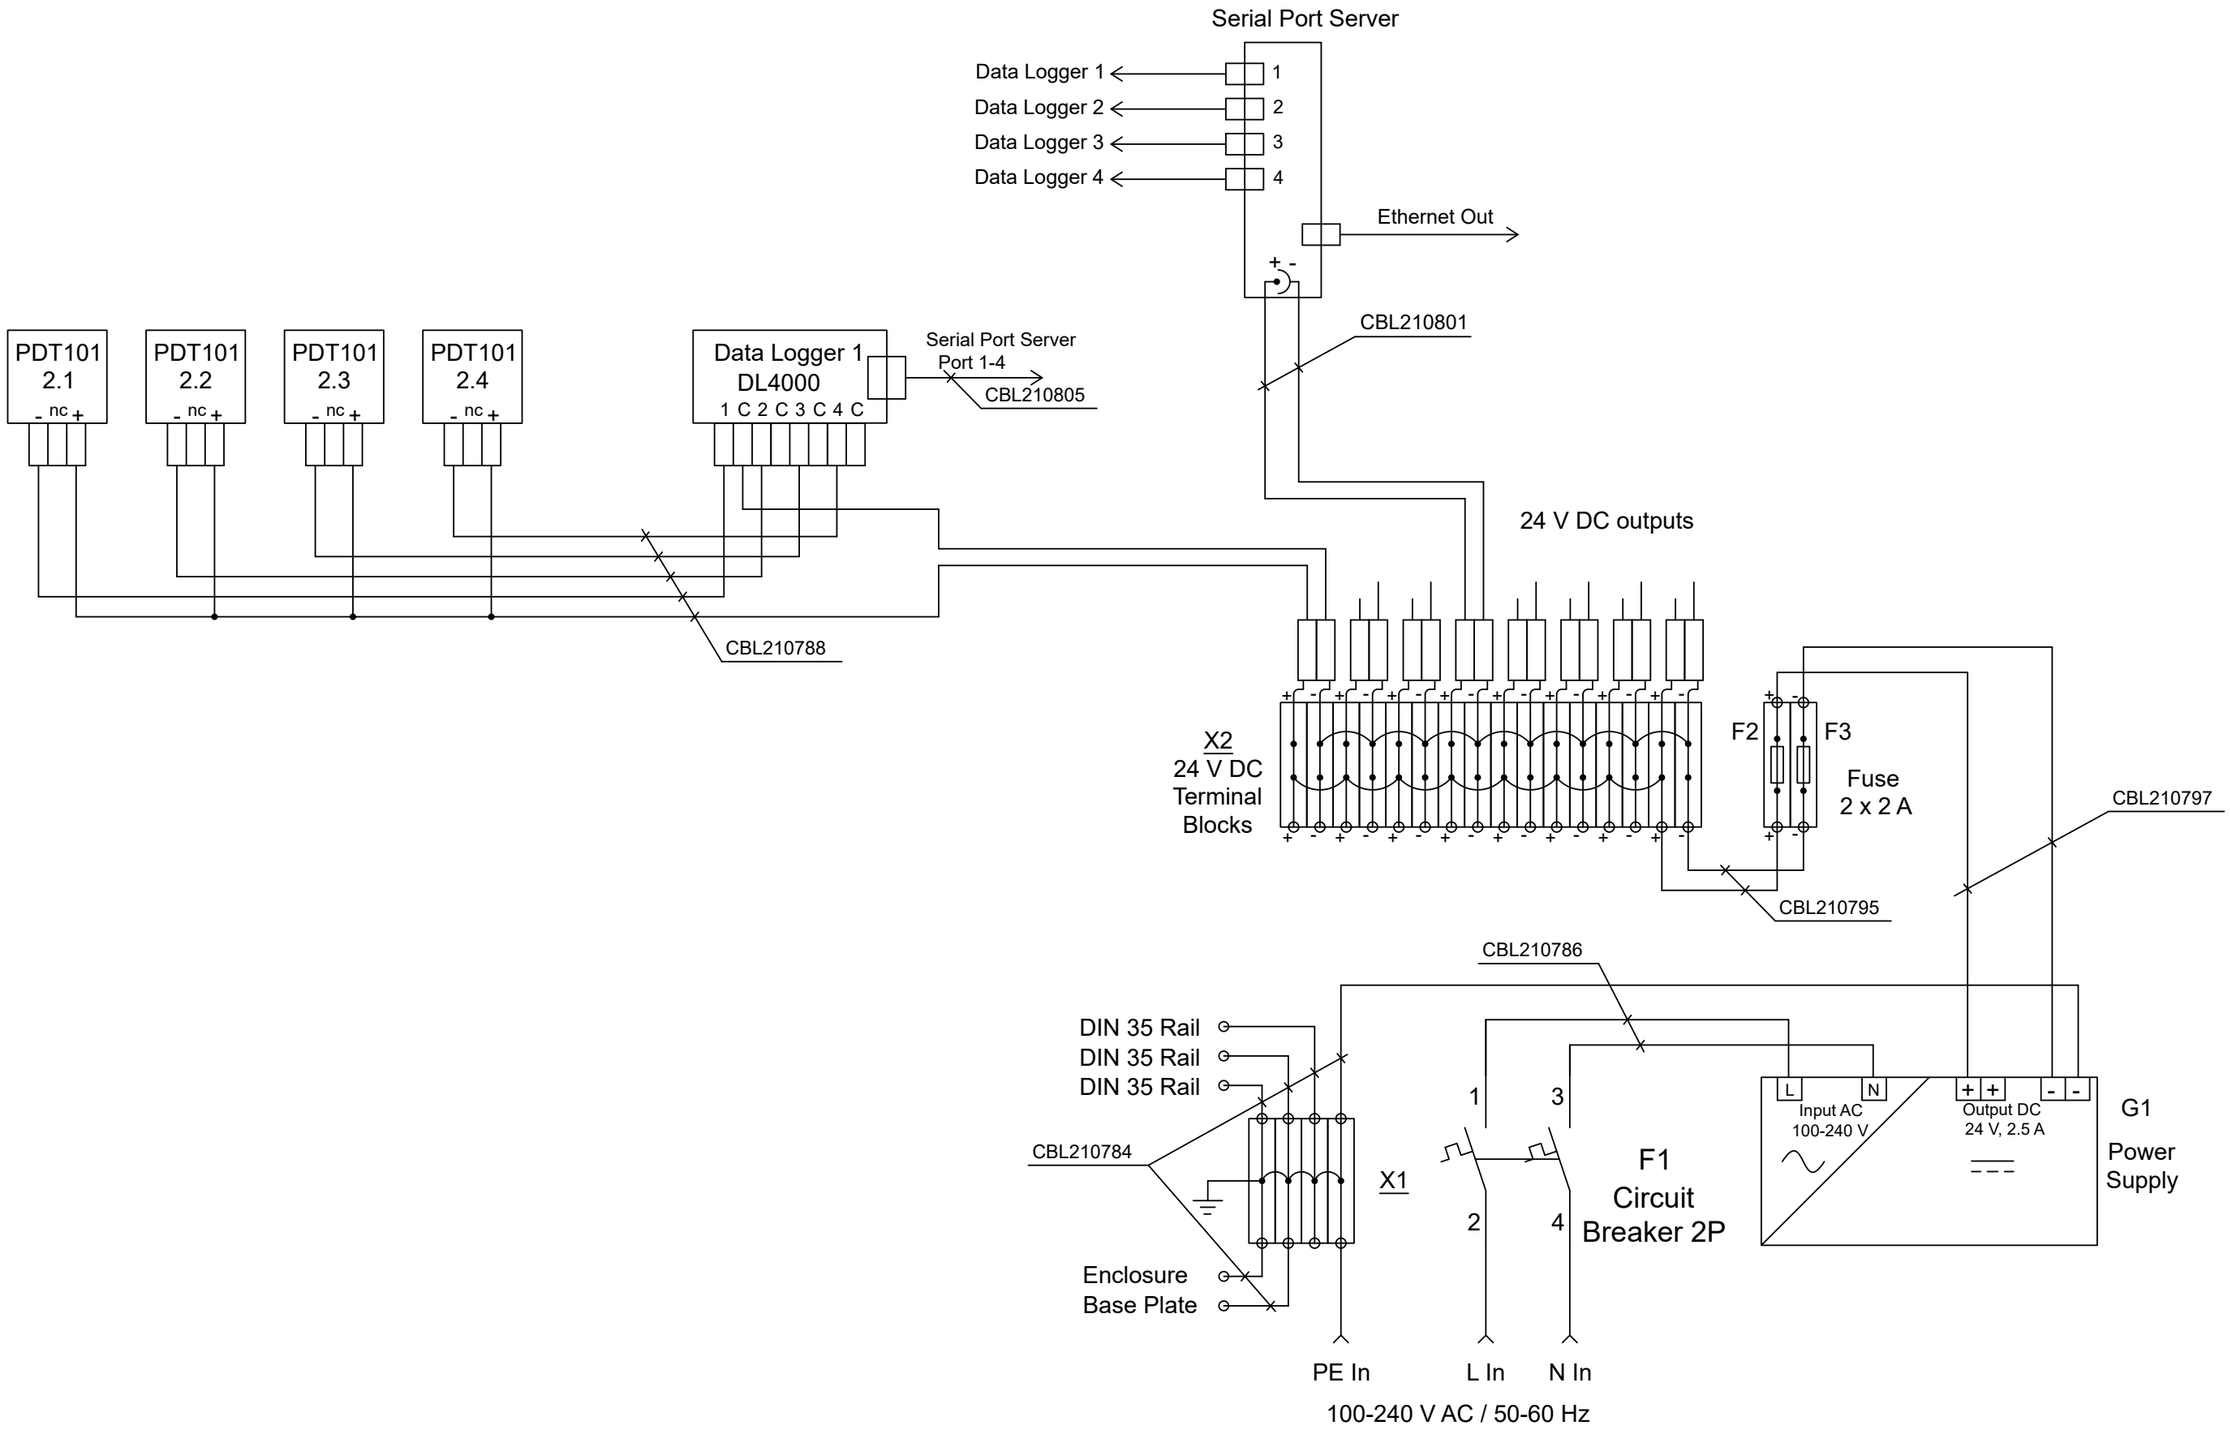

Wiring diagram for CAB100B analog channel model used with loop-powered measurement devices

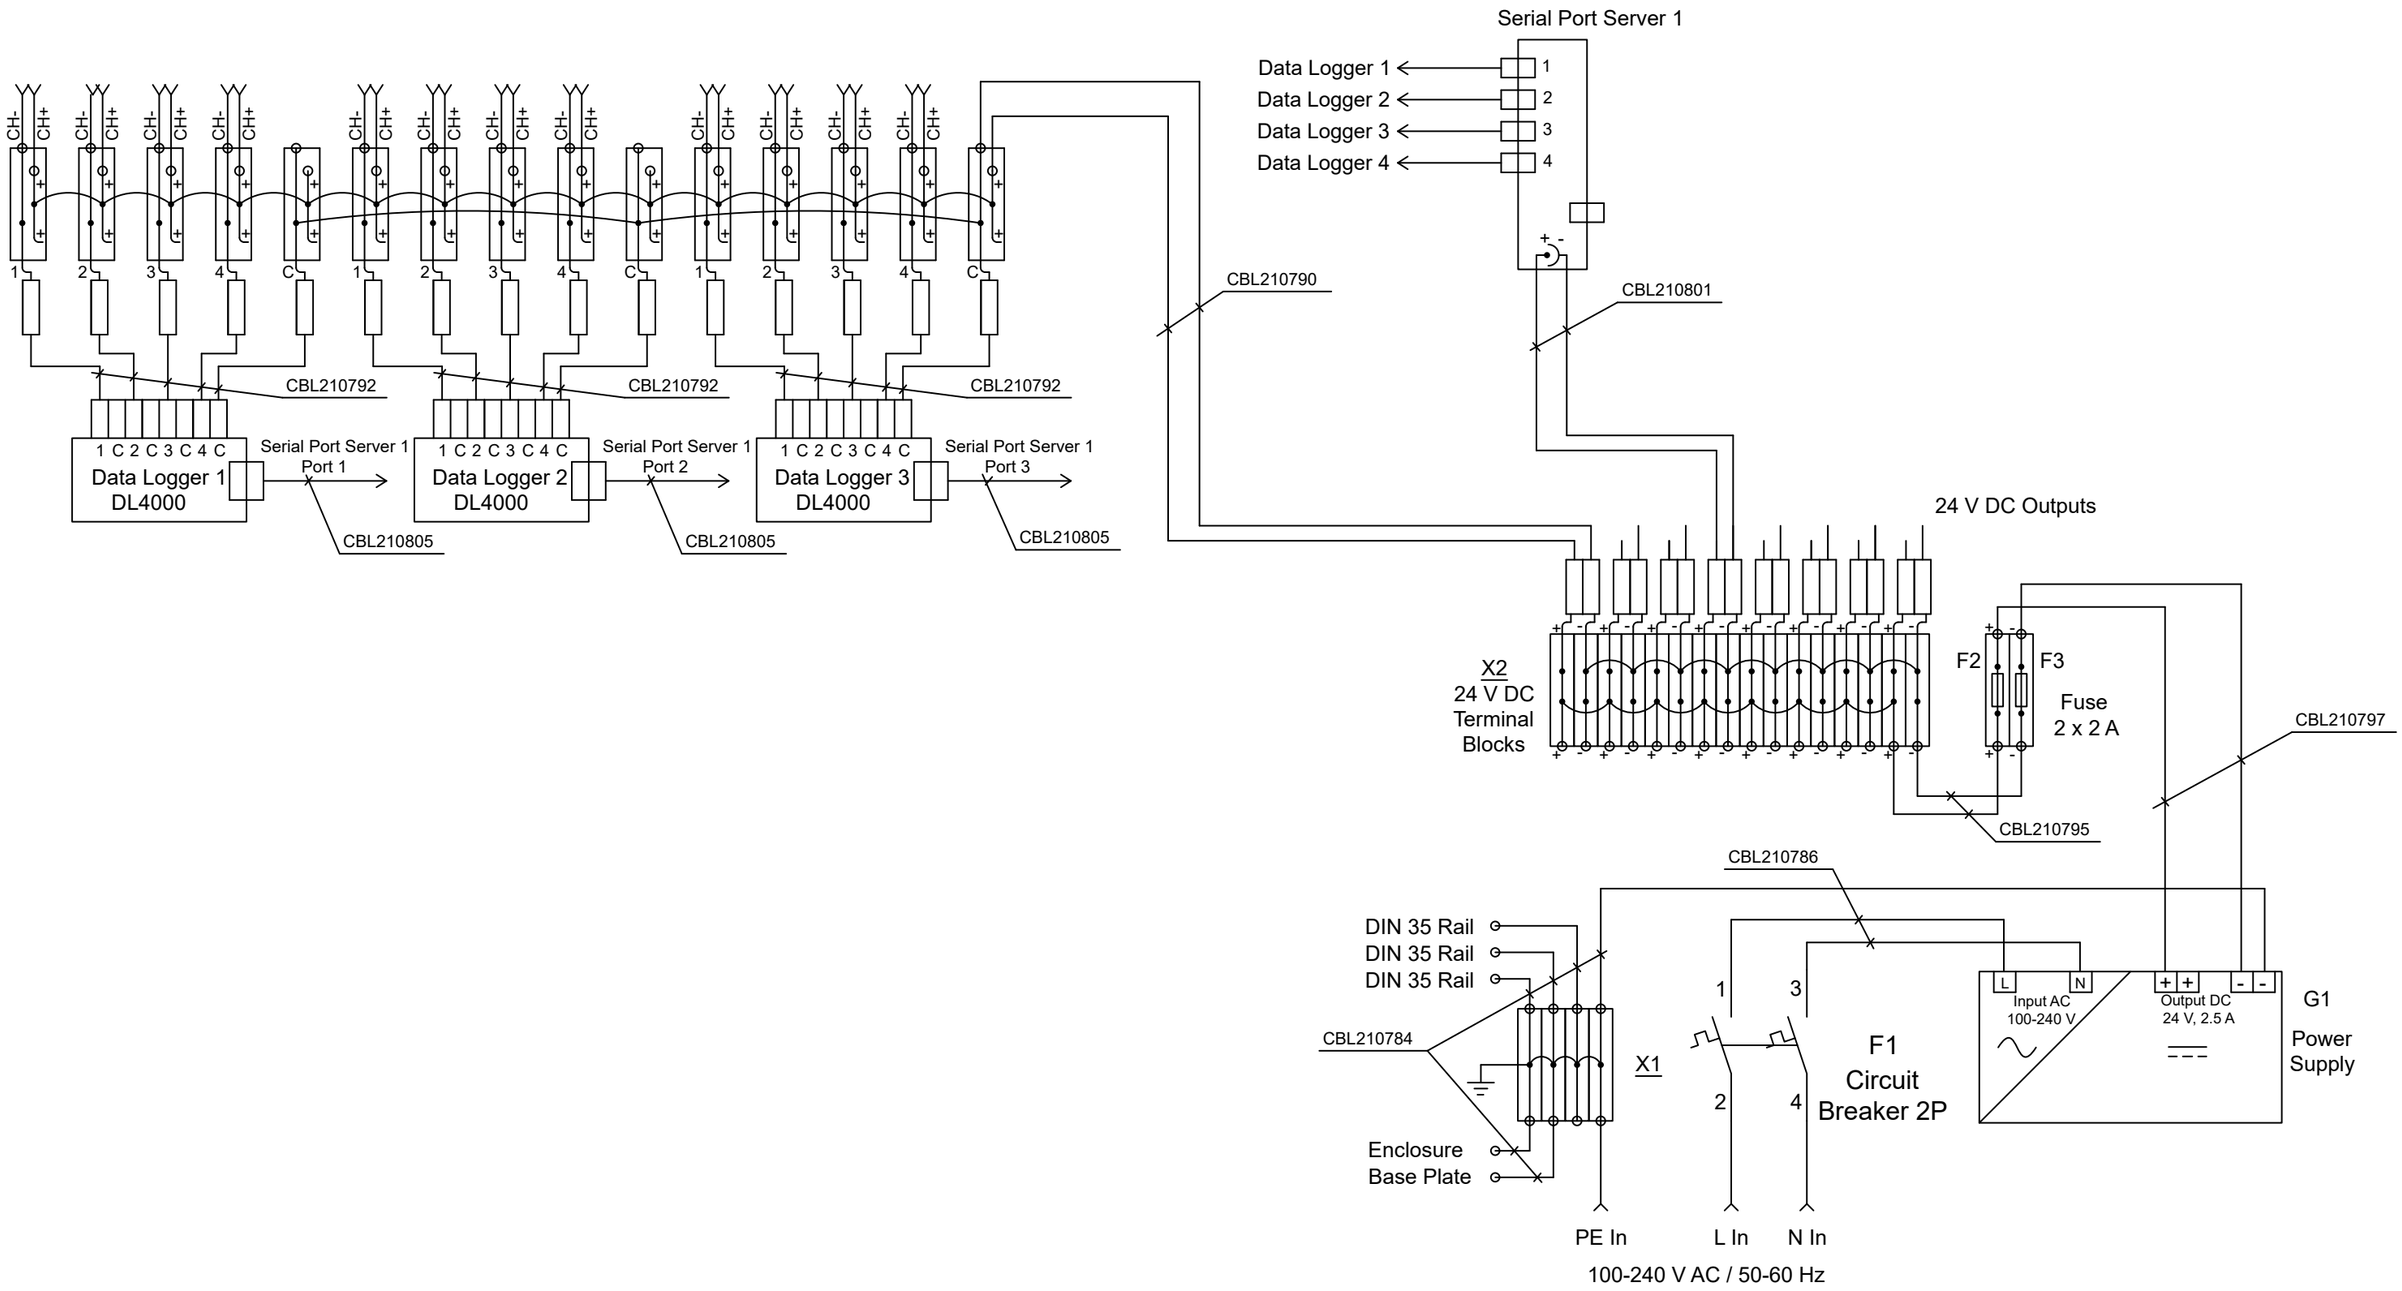

Wiring diagram for CAB100B analog channel model used with externally powered measurement devices

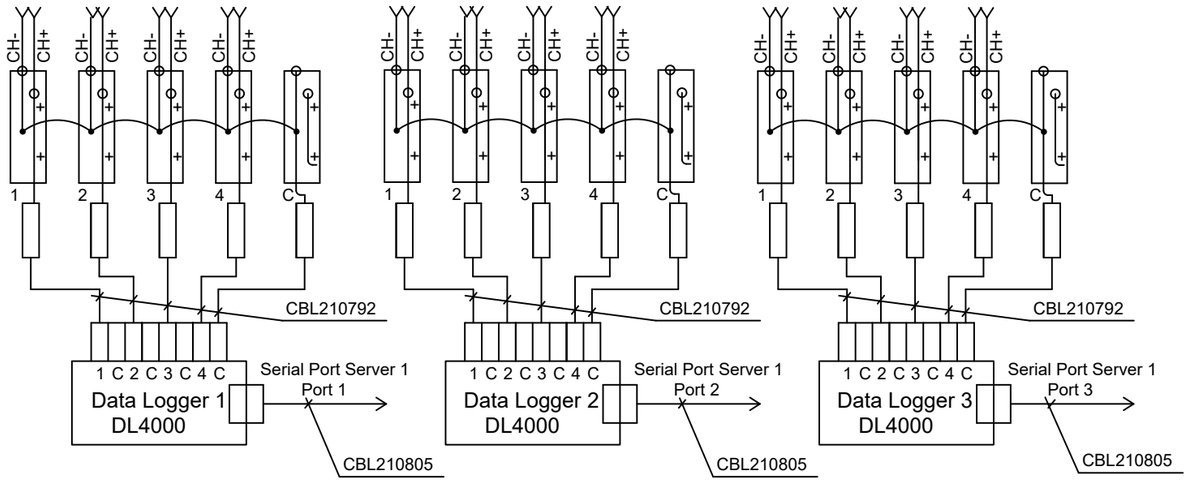

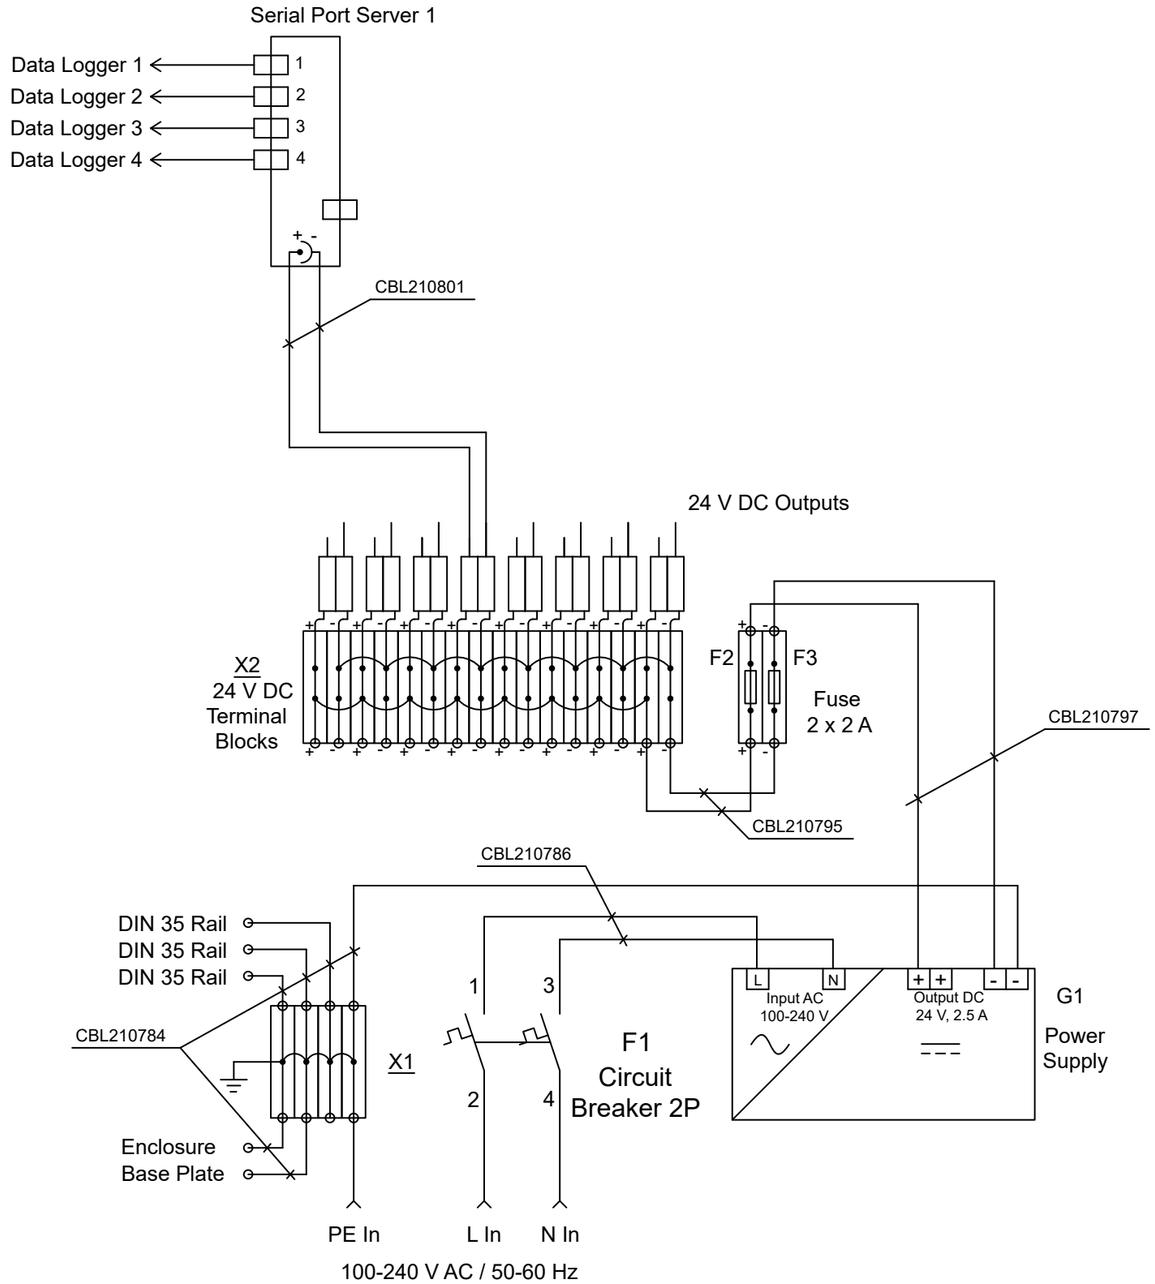

Wiring diagram for CAB100B safety barrier model

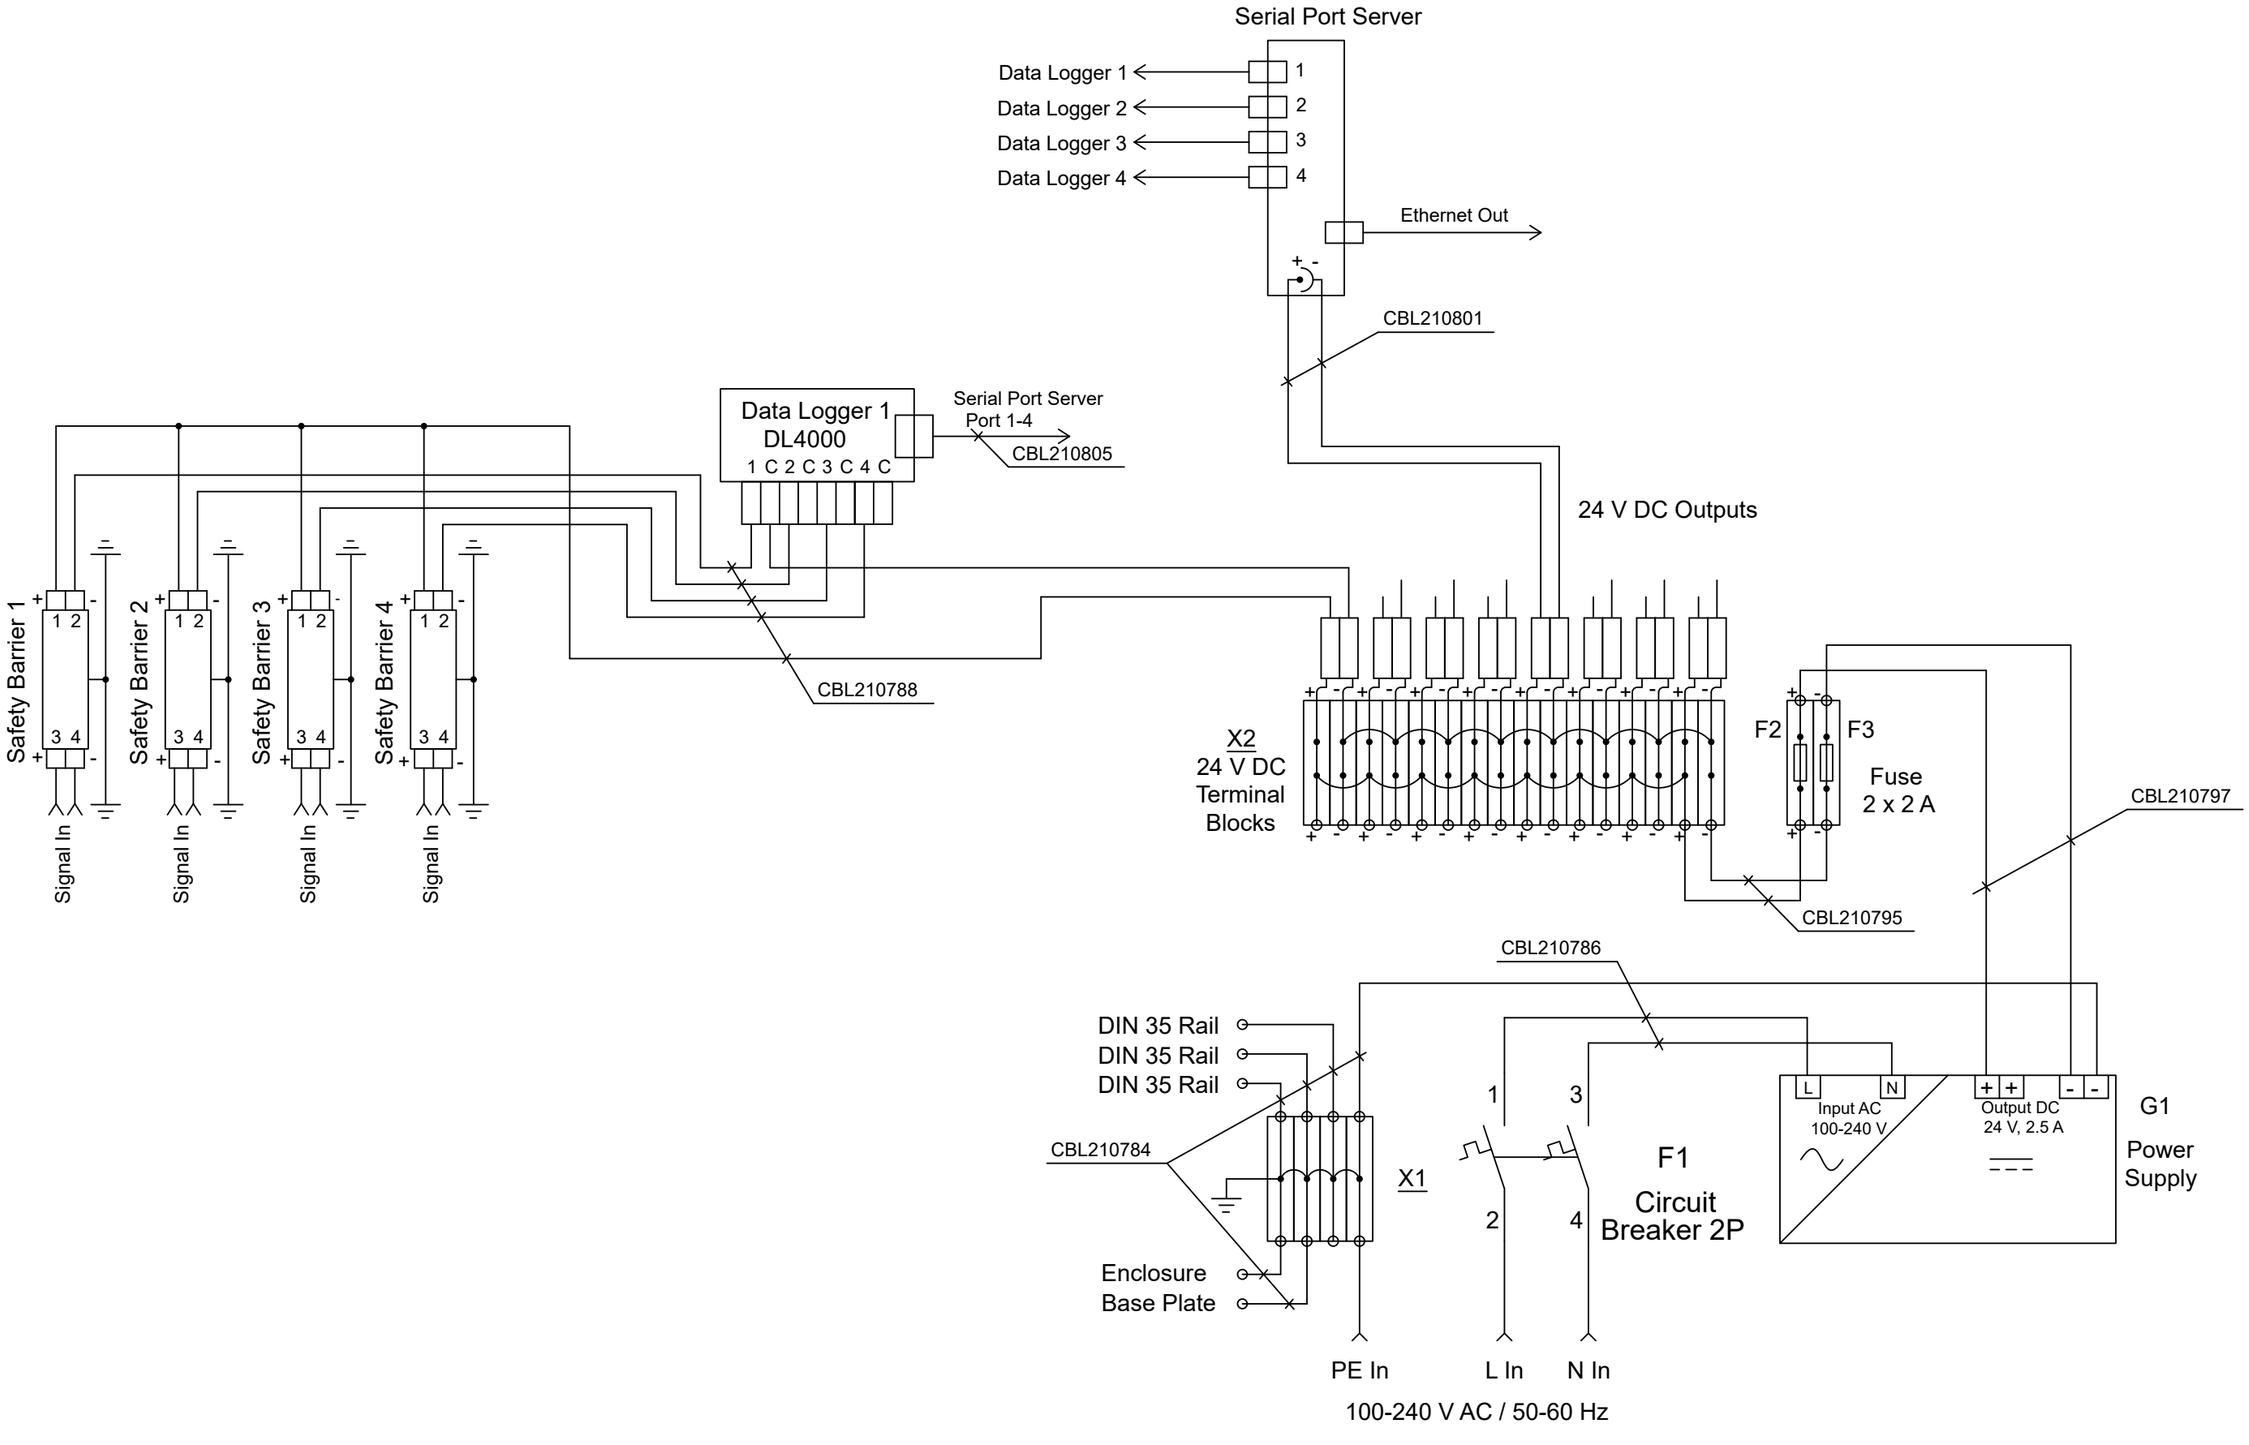
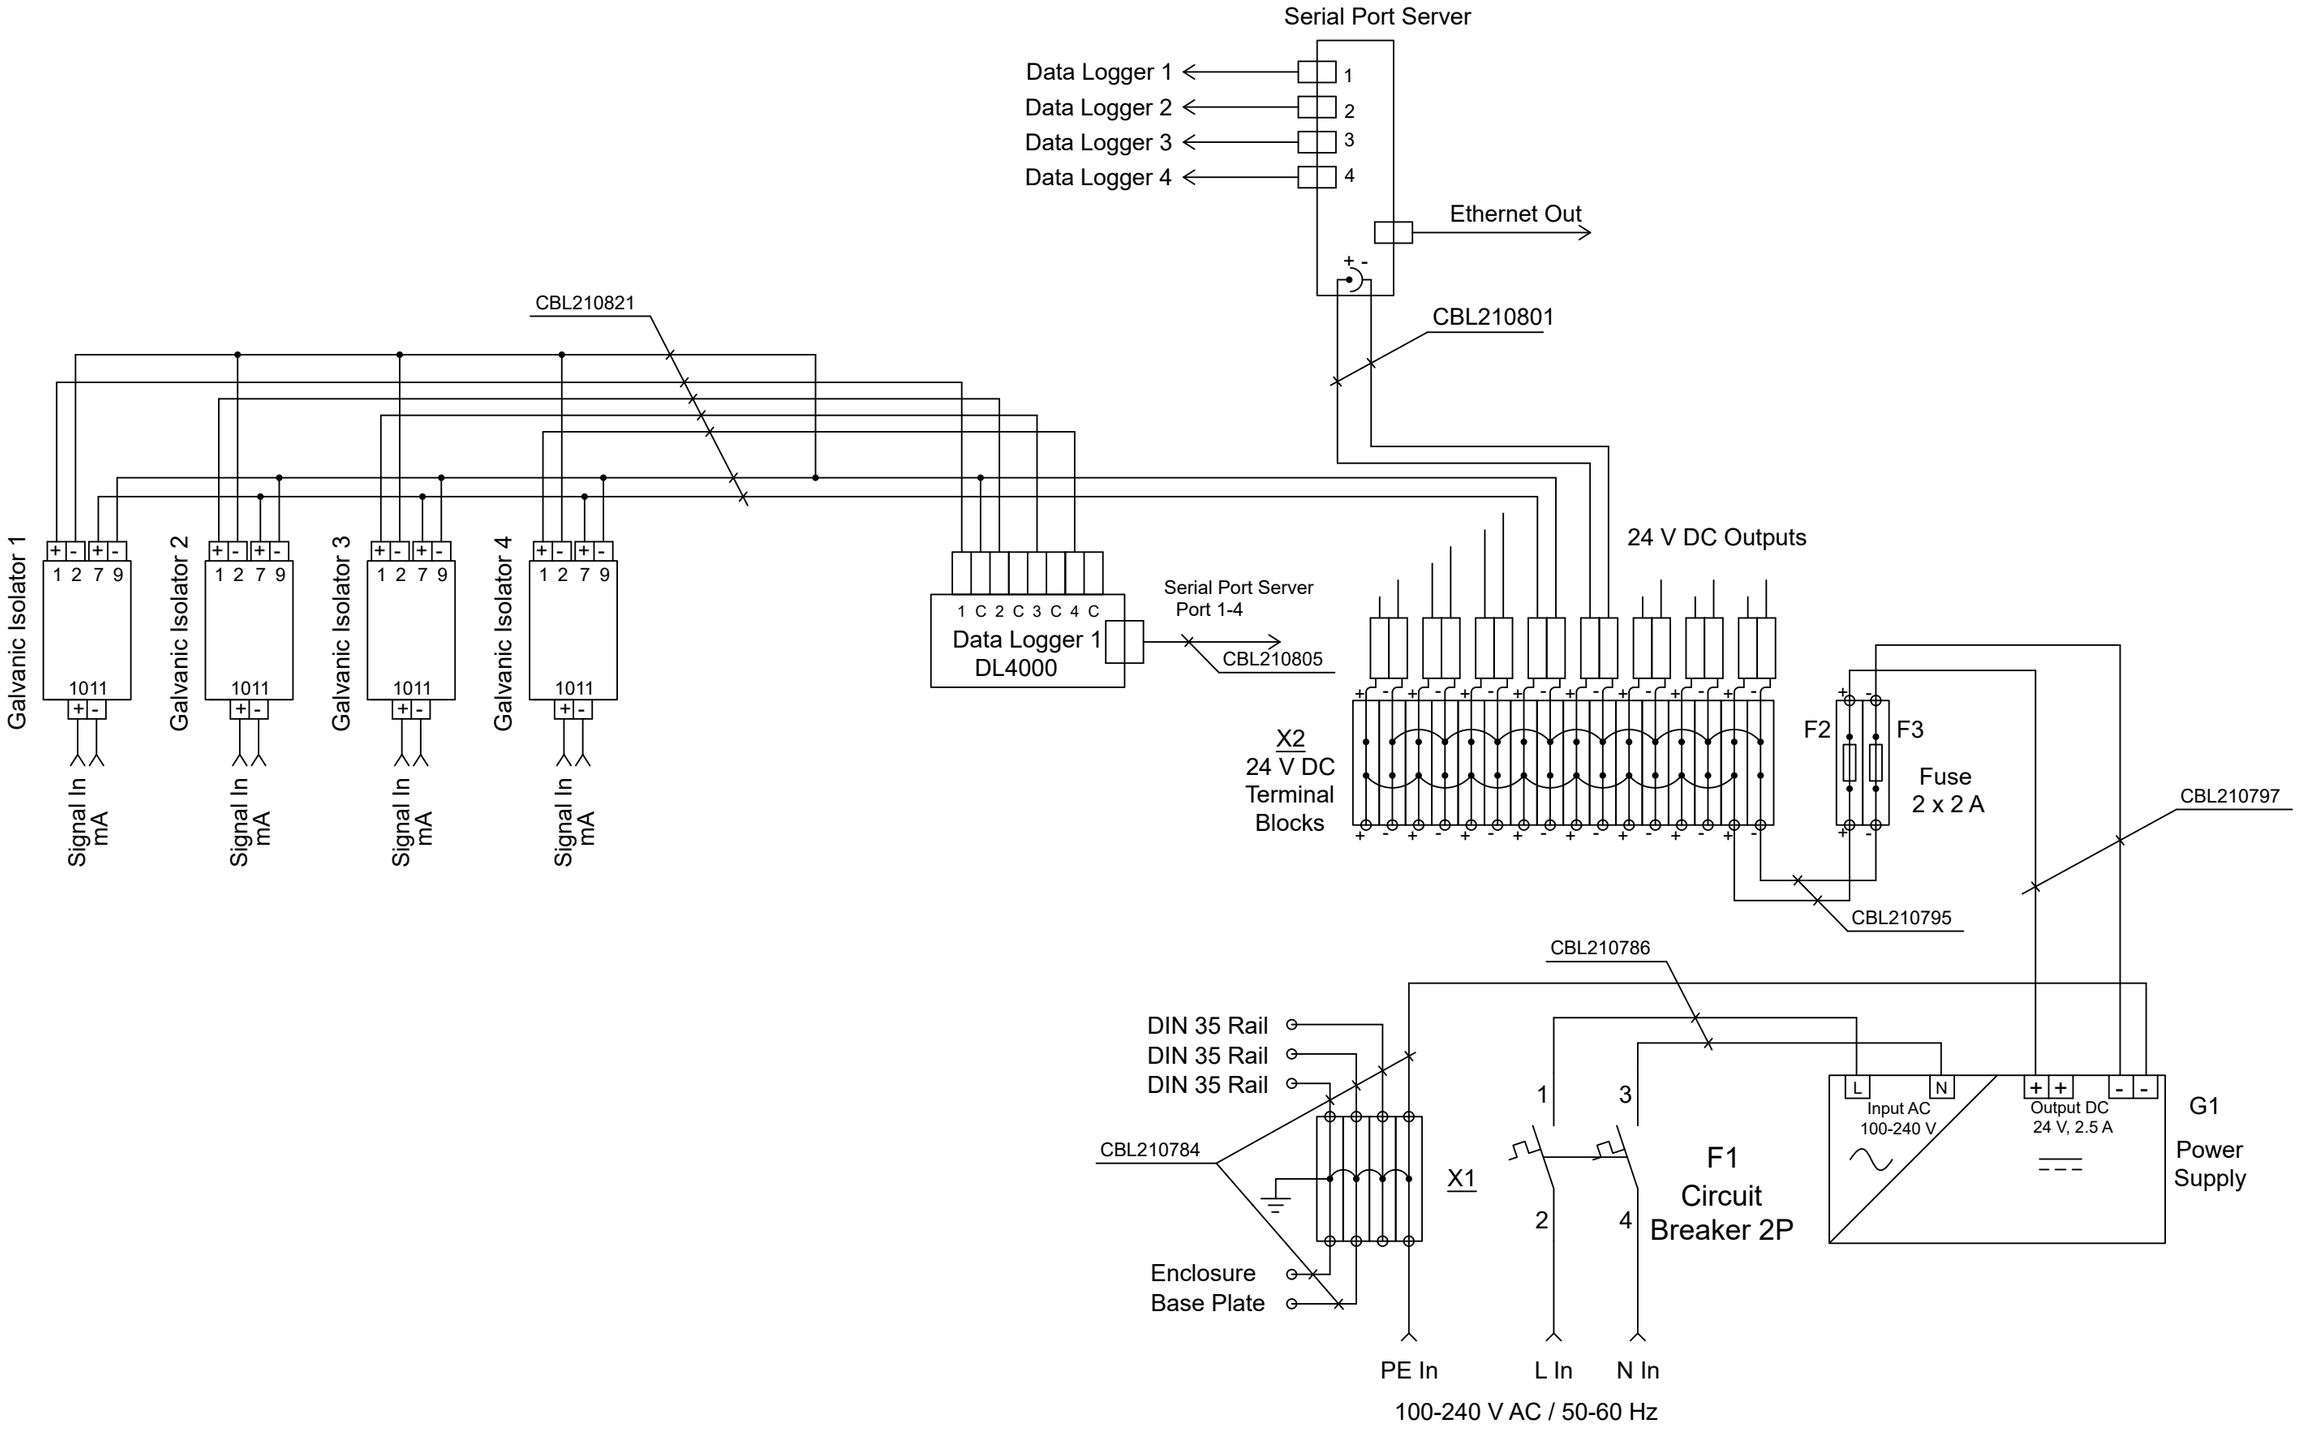
Wiring diagram for CAB100B galvanic isolator model